

**NSK**

DOUBLE-ROW BALL BEARINGS  
CUSTOMIZED BALL BEARINGS



## Double Row Ball Bearings and Customized Ball Bearings





## Content

|                                                                                                    |           |
|----------------------------------------------------------------------------------------------------|-----------|
| <b>Tailormade Solutions .....</b>                                                                  | <b>4</b>  |
| <b>Products and Applications.....</b>                                                              | <b>6</b>  |
| <b>Standard Production Program .....</b>                                                           | <b>7</b>  |
| <b>Self Aligning Ball Bearings.....</b>                                                            | <b>8</b>  |
| Bore 10–75 mm .....                                                                                | 12        |
| With adapter sleeve, shaft 17–65 mm .....                                                          | 14        |
| Sealed on both sides, bore 12–65 mm.....                                                           | 16        |
| With extended inner ring, bore 20–60 mm.....                                                       | 17        |
| With sleeve, shaft 20–50 mm.....                                                                   | 18        |
| <b>Deep Groove Ball Bearings (Double Row) .....</b>                                                | <b>20</b> |
| Double Row, bore 10–90 mm .....                                                                    | 24        |
| <b>Angular Contact Ball Bearings (Double Row) .....</b>                                            | <b>26</b> |
| Double Row, bore 10–90 mm .....                                                                    | 30        |
| Double Row, with filling slot, bore 10–70 mm .....                                                 | 32        |
| <b>Pulleys.....</b>                                                                                | <b>34</b> |
| Pulleys, bore 10–35 mm .....                                                                       | 36        |
| <b>Life factors (<math>f_h</math>) and speed factors (<math>f_n</math>) for ball bearings.....</b> | <b>38</b> |

## Tailormade Solutions






Everything is possible. NSK special bearings are manufactured according to your specific requirements. The only thing "standard" with all our products is the NSK Quality.

Our products are manufactured to a high standard of quality and reliability, and our management system is certified in accordance with national and international standards. We take responsibility for our total process – when it comes to the environment, too:  
We take it for granted that raw materials and energy must

be used efficiently and that waste must be reduced to the minimum.

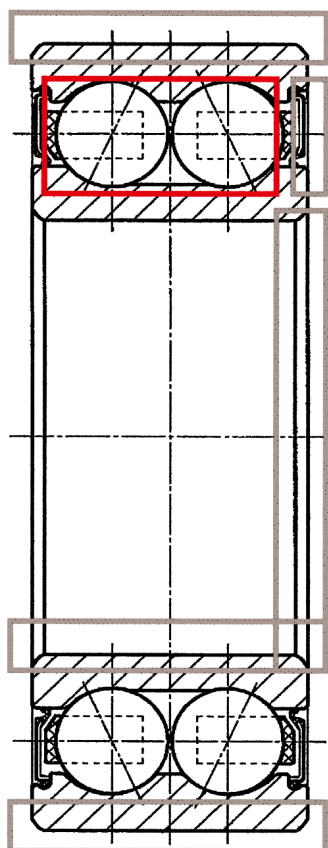

Internal design  
for load ratings:  
DIN/ISO 76  
DIN/ISO 281

#### Outer ring according to customer requirements ›

Diameter

- › Width
- › With groove
- › With bore/thread

#### Profile

- › Spherical
- › Gothic arch
- › V-profile
- › Groove turned or ground

#### Seals according to customer requirements

##### Standard

- › ZR/2ZR
- › RSR/2RSR

##### Special solutions

- › Multi-lipped
- › Labyrinth seal
- › Three-part sealing


#### Inner ring according to customer requirements

##### Bore

- › Diameter
- › Cone
- › Teeth
- › Groove
- › Thread

##### Width

# Products and applications

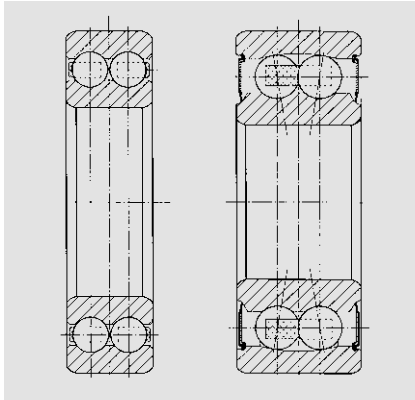

## Double Row Ball Bearings

30 mm–180 mm external diameter (Deep Groove, Angular Contact and Self Aligning Ball Bearings and various versions)

### Deep Groove Ball Bearings in:


- › Wheel Bearings
- › Belt Tensioners
- › Fans

### Angular Contact Ball Bearings in:

- › The Automobile Industry
- › Shaft Encoders
- › Gearboxes
- › Wood Processing Machines
- › Compressors
- › Mast Guide Rollers
- › Pumps
- › Wheel Bearings
- › Belt-Tensioners
- › Tachometers

### Self Aligning Ball Bearings in:


- › Blowers
- › Wood Processing Machines
- › Agricultural Machines
- › Extraction Fans
- › Textile Machines
- › Rollers

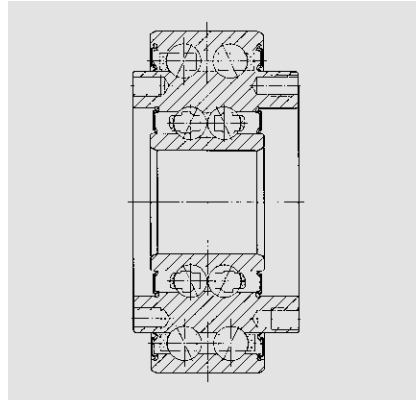

## Double Row Customized Ball Bearings

for applications such as the in-house design of double row clutch-release bearings based on standard bearing or new designs:

- › Wire-Straightening Machines
- › Electromagnetic clutches (for example)
- › Conveyor Equipment
- › Lifting Equipment
- › Wood Processing Machines
- › Chain Pulleys
- › Pulleys
- › Pulleys for overhead chain conveyors
- › Linear Guides
- › Rope Pulleys
- › All types of Tension Pulleys

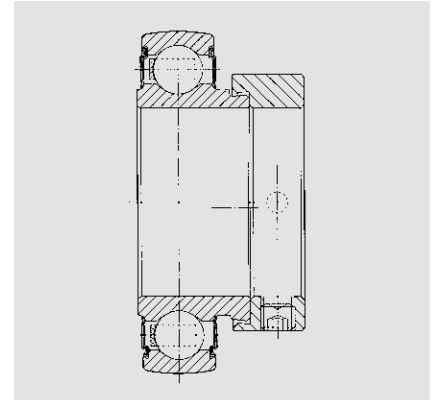

## Radial Insert Bearing with outer ring

for harvesting machines (special designs, suitable for applications where there is high exposure to contamination and for high-pressure cleaning)

- › Conveyor Belts
- › Housed Bearing Units
- › Chain Conveyors
- › Agriculture Machines
- › Support Rollers
- › Fans



## Standard Production Program


| Basic Types     | Open | ZR | ZZR | RSR | 2RSR | N, NR | K | TNG-Cage | J-Cage | C2, C3 |
|-----------------|------|----|-----|-----|------|-------|---|----------|--------|--------|
| 1201-1203       | ●    |    |     |     |      |       |   | ●        | ○      | ●      |
| 1204-1213       | ●    |    |     |     |      |       | ● | ●        | ○      | ●      |
| 1214            | ○    |    |     |     |      |       | ○ | ○        | ○      | ○      |
| 1215            | ●    |    |     |     |      |       | ● | ●        | ○      | ●      |
| 1302-1303       | ●    |    |     |     |      |       |   | ●        | ○      | ●      |
| 1304-1311       | ●    |    |     |     |      |       | ● | ●        | ○      | ●      |
| 1312            | ●    |    |     |     |      |       | ● |          | ●      | ●      |
| 2201-2203       | ●    |    |     |     | ●    |       |   | ●        | ○      | ●      |
| 2204-2213       | ●    |    |     |     | ●    |       | ● | ●        | ○      | ●      |
| 2302-2303       | ●    |    |     |     | ●    |       |   | ●        | ○      | ●      |
| 2304            | ●    |    |     |     |      |       | ● |          | ●      | ●      |
| 2304            | ●    |    |     |     | ●    |       |   | ●        |        | ●      |
| 2305-2313       | ●    |    |     |     | ●    |       | ● | ●        | ○      | ●      |
| 2314            | ●    |    |     |     |      |       | ● |          | ●      | ●      |
| 11204-11212     | ●    |    |     |     |      |       |   | ●        | ○      | ●      |
| 11305-11310     | ●    |    |     |     |      |       |   | ●        | ○      | ●      |
| 11504-11510     | ●    |    |     |     |      |       |   | ●        | ○      | ●      |
| 3200B-3218B     | ●    | ●  | ●   | ●   | ●    | ●     |   | ●        |        | ●      |
| 3301B-3315B     | ●    | ●  | ●   | ●   | ●    | ●     |   | ●        |        | ●      |
| 3200-3214       | ○    |    |     |     |      | ○     |   |          | ○      | ○      |
| 3302-3313       | ○    |    |     |     |      | ○     |   |          | ○      | ○      |
| 3314            | ●    |    |     |     |      | ●     |   |          | ●      | ●      |
| LB3200B-LB3207B |      |    | ●   |     | ●    |       |   | ●        |        |        |
| LZ3200B-KZ3207B |      |    | ●   |     | ●    |       |   | ●        |        |        |
| 4200-4218       | ●    |    |     |     |      |       |   | ●        | ○      | ●      |
| 4302-4315       | ●    |    |     |     |      |       |   | ●        | ○      | ●      |

Special bearings on enquiry  
 ● Standard  
 ○ on enquiry

## Self Aligning Ball Bearings

---



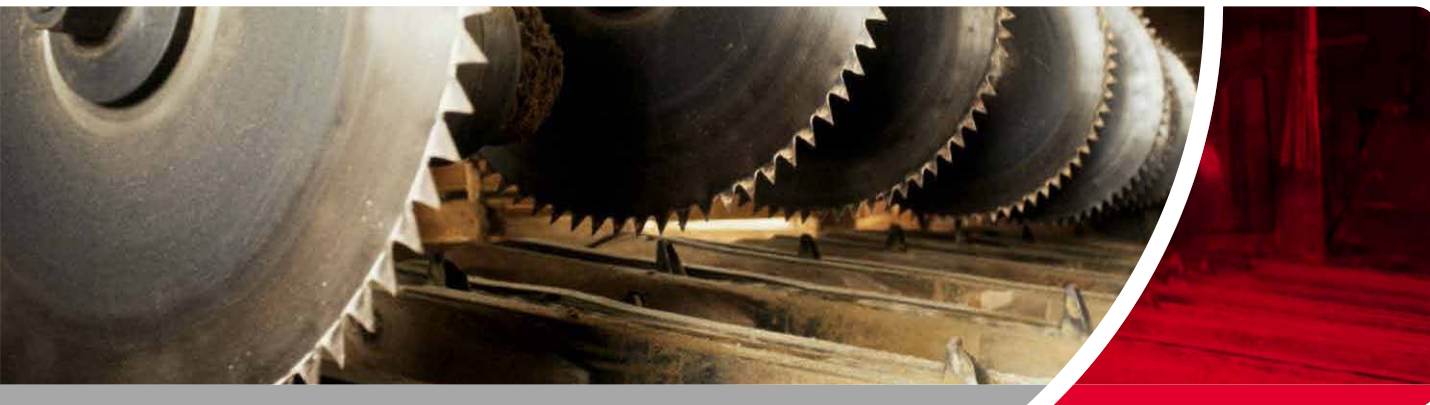

Self Aligning Ball Bearings are double row bearings with a spherical outer ring raceway. The bearings therefore facilitate angle adjustment and are suitable for compensating for angular misalignment.

Self Aligning Ball Bearings are manufactured with cylindrical and tapered bores. The bearings with tapered bore are predominantly fitted to shafts with adapter sleeves.

The cages of these bearings are normally made of glass-fibre reinforced Polyamide 66. Bearings with these cages are marked with the designation "TNG". The cages of some of the small bearings are made of Polyamide 66 without glass-fibre reinforcement. These are marked with the designation "TN".

A very few bearings (Version J) are mass produced with cages made of pressed steel. The bearings which are normally fitted with plastic cages are also available on request with cages made of pressed steel "J".

Series 22.. and 23.. Self Aligning Bearings are also available sealed on both sides. These bearings are marked with the designation "2RS".

#### **Tolerances**

The bearings are only manufactured to the standard tolerance P0.

#### **Bearing clearance**

Self Aligning Bearings with cylindrical bores are normally manufactured with standard radial clearance C0 and those with a tapered bore with radial clearance C3. Bearings with other clearances are available on enquiry. The clearances can be found in the table on the next page.

# Self Aligning Ball Bearings

## Seals

NSK manufactures Series 22.. and 23.. Self Aligning Ball Bearings, not only as an open version but also with seals on both sides of the bearing. These seals are made of nitrile rubber and are reinforced with a steel disc embedded in the rubber. The seals are fixed in the outer ring and seal against the inner ring with a friction sealing lip.

Sealed Self Aligning Ball Bearings are filled with enough grease at the factory to last the normal life span of the bearing. The bearings are therefore maintenance free. Note that sealed Self Aligning Bearings have a lower load-carrying capacity than open bearings of the same type. During installation, it is essential that they are not twisted, as otherwise the seals may be forced out of position.

## Angle adjustment facility

Self Aligning Bearings facilitate angle adjustment. The permitted angle of tilt from the central position for Series 12.. and 22.. open bearings is 2.5° and for Series 13.. and 23.. is 3°. With sealed bearings, the permitted angle of tilt is 1.5°.

## Dynamic equivalent bearing load

$$P = F_r + Y_1 \cdot F_a \quad [\text{kN}] \text{ for } F_a/F_r \leq e$$
$$P = 0.65 \cdot F_r + Y_2 \cdot F_a \quad [\text{kN}] \text{ for } F_a/F_r > e$$

The factors  $e$ ,  $Y_1$  and  $Y_2$  can be found in the bearing tables.

## Basic rating life

$$L_h = \frac{1,000,000}{n \cdot 60} \cdot \left( \frac{C}{P} \right)^3 \quad (\text{Running hours})$$

$$f_h = f_n \cdot \frac{C}{P} \quad (\text{Factors } f_h \text{ and } f_n \text{ see tables on p. 40/41})$$

## Static equivalent bearing load

$$P_0 = F_r + Y_0 \cdot F_a \quad [\text{kN}]$$

The factor  $Y_0$  can be found in the bearing tables.

## Basic static load rating

$$S_0 = \frac{C_0}{P_0}$$

## Radial bearing clearance of Self Aligning Ball Bearings with cylindrical bore without load

| Rated size of bore (mm) | above | 6  | 10 | 14 | 18 | 24 | 30 | 40 | 50 |
|-------------------------|-------|----|----|----|----|----|----|----|----|
|                         | up to | 10 | 14 | 18 | 24 | 30 | 40 | 50 | 65 |
| <b>C2</b>               | min.  | 2  | 2  | 3  | 4  | 5  | 6  | 6  | 7  |
|                         | max.  | 9  | 10 | 12 | 14 | 16 | 18 | 19 | 21 |
| <b>C0 Standard</b>      | min.  | 6  | 6  | 8  | 10 | 11 | 13 | 14 | 16 |
|                         | max.  | 17 | 19 | 21 | 23 | 24 | 29 | 31 | 36 |
| <b>C3</b>               | min.  | 12 | 13 | 15 | 17 | 19 | 23 | 25 | 30 |
|                         | max.  | 25 | 26 | 28 | 30 | 35 | 40 | 44 | 50 |
| <b>C4</b>               | min.  | 19 | 21 | 23 | 25 | 29 | 34 | 37 | 45 |
|                         | max.  | 33 | 35 | 37 | 39 | 46 | 53 | 57 | 69 |
| <b>C5</b>               | min.  | 27 | 30 | 32 | 34 | 40 | 46 | 50 | 62 |
|                         | max.  | 42 | 48 | 50 | 52 | 58 | 66 | 71 | 88 |

**Note:** Bearing clearances in  $\mu\text{m}$

## Radial bearing clearance of Self Aligning Ball Bearings with tapered bore without load


| Rated size of bore (mm) | above | 18 | 24 | 30 | 40 | 50 |
|-------------------------|-------|----|----|----|----|----|
|                         | up to | 24 | 30 | 40 | 50 | 65 |
| <b>C2</b>               | min.  | 7  | 9  | 12 | 14 | 18 |
|                         | max.  | 17 | 20 | 24 | 27 | 32 |
| <b>C0</b>               | min.  | 13 | 15 | 19 | 22 | 27 |
|                         | max.  | 26 | 28 | 35 | 39 | 47 |
| <b>C3 Standard</b>      | min.  | 20 | 23 | 29 | 33 | 41 |
|                         | max.  | 33 | 39 | 46 | 52 | 61 |
| <b>C4</b>               | min.  | 28 | 33 | 40 | 45 | 56 |
|                         | max.  | 42 | 50 | 59 | 65 | 80 |
| <b>C5</b>               | min.  | 37 | 44 | 52 | 58 | 73 |
|                         | max.  | 55 | 62 | 72 | 79 | 99 |

**Note:** Bearing clearances in  $\mu\text{m}$


# Self Aligning Ball Bearings

Bore 10 – 75 mm



| Dimensions |     |    |                      | Abbreviation for |              | Load ratings |                      | Speed limits |        | Abutment dimensions |                    |                    | Factors |                |                |                                    | Weight                             | Abbreviation |
|------------|-----|----|----------------------|------------------|--------------|--------------|----------------------|--------------|--------|---------------------|--------------------|--------------------|---------|----------------|----------------|------------------------------------|------------------------------------|--------------|
| d          | D   | B  | r <sub>1,2</sub> min | cylindrical bore | tapered bore | dyn. C       | stat. C <sub>0</sub> | Grease       | Oil    | d <sub>a</sub> min  | D <sub>a</sub> max | r <sub>a</sub> max | e       | Y <sub>1</sub> | Y <sub>2</sub> | Y <sub>0</sub>                     |                                    |              |
| mm         |     |    |                      |                  |              |              |                      | kN           |        | min <sup>-1</sup>   |                    | mm                 |         |                |                | F <sub>a</sub> /F <sub>r</sub> ≤ e | F <sub>a</sub> /f <sub>r</sub> > e |              |
| 10         | 30  | 9  | 0.6                  | 1200TN           | —            | 5.50         | 1.53                 | 24,000       | 30,000 | 14.0                | 26.0               | 0.6                | 0.32    | 2.0            | 3.00           | 2.1                                | 0.034                              | 1200TN       |
|            | 30  | 14 | 0.6                  | 2200TN           | —            | 7.20         | 2.04                 | 24,000       | 30,000 | 14.0                | 26.0               | 0.6                | 0.66    | 1.0            | 1.50           | 1.0                                | 0.047                              | 2200TN       |
| 12         | 32  | 10 | 0.6                  | 1201TNG          | —            | 5.60         | 1.27                 | 24,000       | 30,000 | 16.0                | 28.0               | 0.6                | 0.37    | 1.7            | 2.60           | 1.8                                | 0.040                              | 1201TNG      |
|            | 32  | 14 | 0.6                  | 2201ETNG         | —            | 9.00         | 1.96                 | 20,000       | 26,000 | 16.0                | 28.0               | 0.6                | 0.53    | 1.2            | 1.85           | 1.3                                | 0.053                              | 2201ETNG     |
|            | 37  | 12 | 1.0                  | 1301TN           | —            | 9.50         | 2.16                 | 18,000       | 22,000 | 17.0                | 32.0               | 1.0                | 0.35    | 1.8            | 2.80           | 1.9                                | 0.067                              | 1301TN       |
| 15         | 35  | 11 | 0.6                  | 1202TNG          | —            | 7.50         | 1.76                 | 20,000       | 26,000 | 19.0                | 31.0               | 0.6                | 0.34    | 1.9            | 2.90           | 2.0                                | 0.049                              | 1202TNG      |
|            | 35  | 14 | 0.6                  | 2202ETNG         | —            | 9.15         | 2.08                 | 19,000       | 24,000 | 19.0                | 31.0               | 0.6                | 0.46    | 1.4            | 2.10           | 1.4                                | 0.060                              | 2202ETNG     |
|            | 42  | 13 | 1.0                  | 1302TN           | —            | 9.50         | 2.28                 | 17,000       | 20,000 | 20.0                | 37.0               | 1.0                | 0.35    | 1.8            | 2.80           | 1.9                                | 0.094                              | 1302TN       |
|            | 42  | 17 | 1.0                  | 2302ETNG         | —            | 12.00        | 2.90                 | 16,000       | 19,000 | 20.0                | 37.0               | 1.0                | 0.51    | 1.2            | 1.90           | 1.3                                | 0.110                              | 2302ETNG     |
| 17         | 40  | 12 | 0.6                  | 1203TNG          | —            | 8.00         | 2.04                 | 18,000       | 22,000 | 21.0                | 36.0               | 0.6                | 0.33    | 1.9            | 3.00           | 2.0                                | 0.073                              | 1203TNG      |
|            | 40  | 16 | 0.6                  | 2203ETNG         | —            | 11.40        | 2.75                 | 16,000       | 19,000 | 21.0                | 36.0               | 0.6                | 0.46    | 1.4            | 2.10           | 1.4                                | 0.088                              | 2203ETNG     |
|            | 47  | 14 | 1.0                  | 1303TN           | —            | 12.50        | 3.20                 | 15,000       | 18,000 | 22.0                | 42.0               | 1.0                | 0.32    | 1.9            | 3.00           | 2.0                                | 0.130                              | 1303TN       |
|            | 47  | 19 | 1.0                  | 2303TN           | —            | 14.30        | 3.55                 | 14,000       | 17,000 | 22.0                | 42.0               | 1.0                | 0.53    | 1.2            | 1.90           | 1.3                                | 0.160                              | 2303TN       |
| 20         | 47  | 14 | 1.0                  | 1204TNG          | 1204KTNGC3   | 10.00        | 2.65                 | 15,000       | 18,000 | 25.0                | 42.0               | 1.0                | 0.28    | 2.2            | 3.50           | 2.3                                | 0.120                              | 1204TNG      |
|            | 47  | 18 | 1.0                  | 2204ETNG         | 2204EKTNGC3  | 14.30        | 3.55                 | 14,000       | 17,000 | 25.0                | 42.0               | 1.0                | 0.44    | 1.5            | 2.20           | 1.5                                | 0.140                              | 2204ETNG     |
|            | 52  | 15 | 1.1                  | 1304TNG          | 1304KTNGC3   | 12.50        | 3.35                 | 13,000       | 16,000 | 26.5                | 45.5               | 1.0                | 0.29    | 2.2            | 3.30           | 2.3                                | 0.160                              | 1304TNG      |
|            | 52  | 21 | 1.1                  | 2304J            | 2304KJ C3    | 18.00        | 4.65                 | 13,000       | 16,000 | 26.5                | 45.5               | 1.0                | 0.51    | 1.2            | 1.90           | 1.3                                | 0.210                              | 2304J        |
| 25         | 52  | 15 | 1.0                  | 1205TNG          | 1205KTNGC3   | 12.20        | 3.35                 | 13,000       | 16,000 | 30.0                | 47.0               | 1.0                | 0.27    | 2.4            | 3.70           | 2.5                                | 0.140                              | 1205TNG      |
|            | 52  | 18 | 1.0                  | 2205ETNG         | 2205EKTNGC3  | 17.00        | 4.40                 | 12,000       | 15,000 | 30.0                | 47.0               | 1.0                | 0.35    | 1.8            | 2.80           | 1.9                                | 0.160                              | 2205ETNG     |
|            | 62  | 17 | 1.1                  | 1305TNG          | 1305KTNGC3   | 18.00        | 5.00                 | 11,000       | 14,000 | 31.5                | 55.5               | 1.0                | 0.28    | 2.3            | 3.50           | 2.4                                | 0.260                              | 1305TNG      |
|            | 62  | 24 | 1.1                  | 2305TNG          | 2305KTNGC3   | 24.50        | 6.55                 | 10,000       | 13,000 | 31.5                | 55.5               | 1.0                | 0.48    | 1.3            | 2.00           | 1.4                                | 0.340                              | 2305TNG      |
| 30         | 62  | 16 | 1.0                  | 1206TNG          | 1206KTNGC3   | 15.60        | 4.65                 | 11,000       | 14,000 | 35.0                | 57.0               | 1.0                | 0.25    | 2.5            | 3.90           | 2.7                                | 0.220                              | 1206TNG      |
|            | 62  | 20 | 1.0                  | 2206ETNG         | 2206EKTNGC3  | 25.50        | 6.95                 | 9,500        | 12,000 | 35.0                | 57.0               | 1.0                | 0.30    | 2.1            | 3.30           | 2.2                                | 0.260                              | 2206ETNG     |
|            | 72  | 19 | 1.1                  | 1306TNG          | 1306KTNGC3   | 21.20        | 6.30                 | 9,000        | 11,000 | 36.5                | 65.5               | 1.0                | 0.26    | 2.4            | 3.70           | 2.5                                | 0.390                              | 1306TNG      |
|            | 72  | 27 | 1.1                  | 2306TNG          | 2306KTNGC3   | 31.50        | 8.65                 | 8,500        | 10,000 | 36.5                | 65.5               | 1.0                | 0.45    | 1.4            | 2.20           | 1.5                                | 0.500                              | 2306TNG      |
| 35         | 72  | 17 | 1.1                  | 1207TNG          | 1207KTNGC3   | 16.00        | 5.20                 | 9,500        | 12,000 | 41.5                | 65.5               | 1.0                | 0.22    | 2.8            | 4.30           | 2.9                                | 0.320                              | 1207TNG      |
|            | 72  | 23 | 1.1                  | 2207ETNG         | 2207EKTNGC3  | 32.00        | 9.00                 | 8,000        | 9,500  | 41.5                | 65.5               | 1.0                | 0.30    | 2.1            | 3.30           | 2.2                                | 0.400                              | 2207ETNG     |
|            | 80  | 21 | 1.5                  | 1307TNG          | 1307KTNGC3   | 25.00        | 8.00                 | 8,000        | 9,500  | 43.0                | 72.0               | 1.5                | 0.26    | 2.5            | 3.80           | 2.6                                | 0.510                              | 1307TNG      |
|            | 80  | 31 | 1.5                  | 2307TNG          | 2307KTNGC3   | 39.00        | 11.20                | 7,500        | 9,000  | 43.0                | 72.0               | 1.5                | 0.47    | 1.4            | 2.10           | 1.4                                | 0.680                              | 2307TNG      |
| 40         | 80  | 18 | 1.1                  | 1208TNG          | 1208KTNGC3   | 19.30        | 6.55                 | 8,500        | 10,000 | 46.5                | 73.5               | 1.0                | 0.22    | 2.9            | 4.5            | 3.0                                | 0.420                              | 1208TNG      |
|            | 80  | 23 | 1.1                  | 2208ETNG         | 2208EKTNGC3  | 31.50        | 9.50                 | 7,500        | 9,000  | 46.5                | 73.5               | 1.0                | 0.26    | 2.4            | 3.8            | 2.5                                | 0.510                              | 2208ETNG     |
|            | 90  | 23 | 1.5                  | 1308TNG          | 1308KTNGC3   | 29.00        | 9.65                 | 7,000        | 8,500  | 48.0                | 82.0               | 1.5                | 0.25    | 2.5            | 3.9            | 2.6                                | 0.720                              | 1308TNG      |
|            | 90  | 33 | 1.5                  | 2308TNG          | 2308KTNGC3   | 45.00        | 13.40                | 6,700        | 8,000  | 48.0                | 82.0               | 1.5                | 0.43    | 1.5            | 2.3            | 1.5                                | 0.93                               | 2308TNG      |
| 45         | 85  | 19 | 1.1                  | 1209TNG          | 1209KTNGC3   | 22.00        | 7.35                 | 7,500        | 9,000  | 51.5                | 78.5               | 1.0                | 0.21    | 3.0            | 4.7            | 3.2                                | 0.47                               | 1209TNG      |
|            | 85  | 23 | 1.1                  | 2209ETNG         | 2209EKTNGC3  | 28.00        | 9.00                 | 7,000        | 8,500  | 51.5                | 78.5               | 1.0                | 0.26    | 2.4            | 3.8            | 2.5                                | 0.55                               | 2209ETNG     |
|            | 100 | 25 | 1.5                  | 1309TNG          | 1309KTNGC3   | 38.00        | 12.90                | 6,300        | 7,500  | 53.0                | 92.0               | 1.5                | 0.25    | 2.5            | 3.9            | 2.6                                | 0.96                               | 1309TNG      |
|            | 100 | 36 | 1.5                  | 2309TNG          | 2309KTNGC3   | 54.00        | 16.30                | 6,000        | 7,000  | 53.0                | 92.0               | 1.5                | 0.43    | 1.5            | 2.3            | 1.6                                | 1.25                               | 2309TNG      |
| 50         | 90  | 20 | 1.1                  | 1210TNG          | 1210KTNGC3   | 22.80        | 8.15                 | 7,000        | 8,500  | 56.5                | 83.5               | 1.0                | 0.19    | 3.2            | 4.9            | 3.3                                | 0.53                               | 1210TNG      |
|            | 90  | 23 | 1.1                  | 2210ETNG         | 2210EKTNGC3  | 28.00        | 9.50                 | 6,700        | 8,000  | 56.5                | 83.5               | 1.0                | 0.22    | 2.6            | 4.1            | 3.7                                | 0.59                               | 2210ETNG     |
|            | 110 | 27 | 2.0                  | 1310TNG          | 1310KTNGC3   | 41.50        | 14.30                | 5,600        | 6,700  | 59.0                | 101.0              | 2.0                | 0.24    | 2.6            | 4.0            | 2.7                                | 1.20                               | 1310TNG      |
|            | 110 | 40 | 2.0                  | 2310TNG          | 2310KTNGC3   | 64.00        | 20.00                | 5,300        | 6,300  | 59.0                | 101.0              | 2.0                | 0.43    | 1.5            | 2.3            | 1.5                                | 1.65                               | 2310TNG      |



Cylindrical bore



Tapered bore (Taper 1:12)






| Dimensions |     |    |                  | Abbreviation for |              | Load ratings |                      | Speed limits |       | Abutment dimensions |                    |                    | Factors |                |                |                                    | Weight                             | Abbreviation |
|------------|-----|----|------------------|------------------|--------------|--------------|----------------------|--------------|-------|---------------------|--------------------|--------------------|---------|----------------|----------------|------------------------------------|------------------------------------|--------------|
| d          | D   | B  | r <sub>1,2</sub> | cylindrical bore | tapered bore | dyn. C       | stat. C <sub>0</sub> | Grease       | Oil   | d <sub>a</sub> min  | D <sub>a</sub> max | r <sub>a</sub> max | e       | Y <sub>1</sub> | Y <sub>2</sub> | Y <sub>0</sub>                     |                                    |              |
| mm         |     |    |                  |                  |              |              |                      | kN           |       | min <sup>-1</sup>   |                    | mm                 |         |                |                | F <sub>a</sub> /F <sub>r</sub> ≤ e | F <sub>a</sub> /f <sub>r</sub> > e |              |
| 55         | 100 | 21 | 1.5              | 1211TNG          | 1211KTNGC3   | 27.00        | 10.00                | 6,300        | 7,500 | 63.0                | 92.0               | 1.5                | 0.19    | 3.3            | 5.1            | 3.5                                | 0.71                               | 1211TNG      |
|            | 100 | 25 | 1.5              | 2211ETNG         | 2211EKTNGC3  | 39.00        | 12.70                | 5,600        | 6,700 | 63.0                | 92.0               | 1.5                | 0.22    | 2.9            | 4.5            | 2.1                                | 0.81                               | 2211ETNG     |
|            | 120 | 29 | 2.0              | 1311TNG          | 1311KTNGC3   | 51.00        | 18.00                | 5,000        | 6,000 | 64.0                | 111.0              | 2.0                | 0.24    | 2.7            | 4.1            | 2.8                                | 1.60                               | 1311TNG      |
|            | 120 | 43 | 2.0              | 2311TNG          | 2311KTNGC3   | 75.00        | 23.60                | 4,800        | 5,600 | 64.0                | 111.0              | 2.0                | 0.42    | 1.5            | 2.3            | 1.6                                | 2.10                               | 2311TNG      |
| 60         | 110 | 22 | 1.5              | 1212TNG          | 1212KTNGC3   | 30.00        | 11.60                | 5,600        | 6,700 | 68.5                | 101.5              | 1.5                | 0.18    | 3.5            | 5.4            | 3.6                                | 0.90                               | 1212TNG      |
|            | 110 | 28 | 1.5              | 2212ETNG         | 2212EKTNGC3  | 47.50        | 16.60                | 5,300        | 6,300 | 68.5                | 101.5              | 1.5                | 0.23    | 2.7            | 4.2            | 2.8                                | 1.10                               | 2212ETNG     |
|            | 130 | 31 | 2.0              | 1312J            | 1312KJC3     | 57.50        | 20.80                | 4,800        | 5,600 | 72.0                | 118.0              | 2.0                | 0.23    | 2.8            | 4.3            | 2.9                                | 1.95                               | 1312TNG      |
|            | 130 | 46 | 2.0              | 2312J            | 2312KJC3     | 88.50        | 28.30                | 4,300        | 5,300 | 72.0                | 118.0              | 2.0                | 0.40    | 1.6            | 2.4            | 1.7                                | 2.60                               | 2312TNG      |
| 65         | 120 | 23 | 1.5              | 1213TNG          | 1213KTNGC3   | 31.00        | 12.50                | 5,300        | 6,300 | 73.0                | 112.0              | 1.5                | 0.18    | 3.6            | 5.5            | 3.7                                | 1.15                               | 1213TNG      |
|            | 120 | 31 | 1.5              | 2213ETNG         | 2213EKTNGC3  | 57.00        | 19.30                | 4,500        | 5,300 | 73.0                | 112.0              | 1.5                | 0.23    | 2.8            | 4.3            | 2.9                                | 1.45                               | 2213ETNG     |
|            | 140 | 33 | 2.1              | 1313J            | 1313KTNGC3   | 62.50        | 22.90                | 4,300        | 5,300 | 76.0                | 128.0              | 2.0                | 0.23    | 2.8            | 4.3            | 2.9                                | 2.45                               | 1313J        |
|            | 140 | 48 | 2.1              | 2313J            | 2313KTNGC3   | 96.50        | 32.50                | 4,000        | 4,800 | 76.0                | 128.0              | 2.0                | 0.39    | 1.6            | 2.5            | 1.7                                | 3.25                               | 2313J        |
| 70         | 125 | 24 | 1.5              | 1214TNG          | —            | 34.50        | 13.70                | 5,000        | 6,000 | 78.0                | 116.5              | 1.5                | 0.19    | 3.3            | 5.1            | 3.5                                | 1.25                               | 1214TNG      |
|            | 125 | 31 | 1.5              | 2214J            | —            | 44.00        | 17.10                | 4,500        | 5,600 | 78.0                | 116.5              | 1.5                | 0.26    | 2.4            | 3.7            | 2.5                                | 1.50                               | 2214J        |
|            | 150 | 35 | 2.1              | 1314J            | —            | 67.50        | 25.10                | 4,000        | 5,000 | 81.0                | 138.0              | 2.0                | 0.22    | 2.8            | 4.4            | 3.0                                | 3.00                               | 1314J        |
|            | 150 | 51 | 2.1              | 2314J            | —            | 111.00       | 37.50                | 3,600        | 4,300 | 81.0                | 138.0              | 2.0                | 0.38    | 1.7            | 2.6            | 1.8                                | 4.25                               | 2314J        |
| 75         | 130 | 25 | 1.5              | 1215TNG          | 1215KTNGC3   | 39.00        | 15.60                | 4,800        | 5,600 | 83.5                | 121.5              | 1.5                | 0.17    | 3.6            | 5.6            | 3.8                                | 1.35                               | 1215TNG      |
|            | 130 | 31 | 1.5              | 2215J            | 2215KJC3     | 44.50        | 17.80                | 4,300        | 5,300 | 83.5                | 121.5              | 1.5                | 0.25    | 2.5            | 3.9            | 2.6                                | 1.60                               | 2215J        |
|            | 160 | 37 | 2.1              | 1315J            | 1315KJC3     | 80.00        | 30.00                | 3,800        | 4,500 | 87.0                | 148.0              | 2.0                | 0.22    | 2.8            | 4.4            | 3.0                                | 3.55                               | 1315J        |
|            | 160 | 55 | 2.1              | 2315J            | 2315KJC3     | 125.00       | 43.00                | 3,400        | 4,300 | 87.0                | 148.0              | 2.0                | 0.38    | 1.6            | 2.6            | 1.7                                | 5.15                               | 2315J        |

# Self Aligning Ball Bearings

With adapter sleeve | Shaft 17 – 65 mm


| Dimensions              |     |    |                         | Abbreviation for |        | Load ratings |                      | Speed limits      |        |  |
|-------------------------|-----|----|-------------------------|------------------|--------|--------------|----------------------|-------------------|--------|--|
| d <sub>1</sub><br>Shaft | D   | B  | r <sub>1,2</sub><br>min | Bearing          | Sleeve | dyn. C       | stat. C <sub>0</sub> | Grease            | Oil    |  |
| mm                      |     |    |                         |                  |        | kN           |                      | min <sup>-1</sup> |        |  |
| 17                      | 47  | 14 | 1.0                     | 1204KTNGC3       | H204   | 10.00        | 2.65                 | 15,000            | 18,000 |  |
|                         | 47  | 18 | 1.0                     | 2204EKTNGC3      | H304   | 14.30        | 3.55                 | 14,000            | 17,000 |  |
|                         | 52  | 15 | 1.1                     | 1304KTNGC3       | H304   | 12.50        | 3.35                 | 13,000            | 16,000 |  |
|                         | 52  | 21 | 1.1                     | 2304KJC3         | H2304  | 18.00        | 4.65                 | 13,000            | 16,000 |  |
| 20                      | 52  | 15 | 1.0                     | 1205KTNGC3       | H205   | 12.20        | 3.35                 | 13,000            | 16,000 |  |
|                         | 52  | 18 | 1.0                     | 2205EKTNGC3      | H305   | 17.00        | 4.40                 | 12,000            | 15,000 |  |
|                         | 62  | 17 | 1.1                     | 1305KTNGC3       | H305   | 18.00        | 5.00                 | 11,000            | 14,000 |  |
|                         | 62  | 24 | 1.1                     | 2305KTNGC3       | H2305  | 24.50        | 6.55                 | 10,000            | 13,000 |  |
| 25                      | 62  | 16 | 1.0                     | 1206KTNGC3       | H206   | 15.60        | 4.65                 | 11,000            | 14,000 |  |
|                         | 62  | 20 | 1.0                     | 2206EKTNGC3      | H306   | 25.50        | 6.95                 | 9,500             | 12,000 |  |
|                         | 72  | 19 | 1.1                     | 1306KTNGC3       | H306   | 21.20        | 6.30                 | 9,000             | 11,000 |  |
|                         | 72  | 27 | 1.1                     | 2306KTNGC3       | H2306  | 31.50        | 8.65                 | 8,500             | 10,000 |  |
| 30                      | 72  | 17 | 1.1                     | 1207KTNGC3       | H207   | 16.00        | 5.20                 | 9,500             | 12,000 |  |
|                         | 72  | 23 | 1.1                     | 2207EKTNGC3      | H307   | 32.00        | 9.00                 | 8,000             | 9,500  |  |
|                         | 80  | 21 | 1.5                     | 1307KTNGC3       | H307   | 25.00        | 8.00                 | 8,000             | 9,500  |  |
|                         | 80  | 31 | 1.5                     | 2307KTNGC3       | H2307  | 39.00        | 11.20                | 7,500             | 9,000  |  |
| 35                      | 80  | 18 | 1.1                     | 1208KTNGC3       | H208   | 19.30        | 6.55                 | 8,500             | 10,000 |  |
|                         | 80  | 23 | 1.1                     | 2208EKTNGC3      | H308   | 31.50        | 9.50                 | 7,500             | 9,000  |  |
|                         | 90  | 23 | 1.5                     | 1308KTNGC3       | H308   | 29.00        | 9.65                 | 7,000             | 8,500  |  |
|                         | 90  | 33 | 1.5                     | 2308KTNGC3       | H2308  | 45.00        | 13.40                | 6,700             | 8,000  |  |
| 40                      | 85  | 19 | 1.1                     | 1209KTNGC3       | H209   | 22.00        | 7.35                 | 7,500             | 9,000  |  |
|                         | 85  | 23 | 1.1                     | 2209EKTNGC3      | H309   | 28.00        | 9.00                 | 7,000             | 8,500  |  |
|                         | 100 | 25 | 1.5                     | 1309KTNGC3       | H309   | 38.00        | 12.90                | 6,300             | 7,500  |  |
|                         | 100 | 36 | 1.5                     | 2309KTNGC3       | H2309  | 54.00        | 16.30                | 6,000             | 7,000  |  |
| 45                      | 90  | 20 | 1.1                     | 1210KTNGC3       | H210   | 22.90        | 8.15                 | 7,000             | 8,500  |  |
|                         | 90  | 23 | 1.1                     | 2210EKTNGC3      | H310   | 28.00        | 9.50                 | 6,700             | 8,000  |  |
|                         | 110 | 27 | 2.0                     | 1310KTNGC3       | H310   | 41.50        | 14.30                | 5,600             | 6,700  |  |
|                         | 110 | 40 | 2.0                     | 2310KTNGC3       | H2310  | 64.00        | 20.00                | 5,300             | 6,300  |  |
| 50                      | 100 | 21 | 1.5                     | 1211KTNGC3       | H211   | 27.00        | 10.00                | 6,300             | 7,500  |  |
|                         | 100 | 25 | 1.5                     | 2211EKTNGC3      | H311   | 39.00        | 12.70                | 5,600             | 6,700  |  |
|                         | 120 | 29 | 2.0                     | 1311KTNGC3       | H311   | 51.00        | 18.00                | 5,000             | 6,000  |  |
|                         | 120 | 43 | 2.0                     | 2311KTNGC3       | H2311  | 75.00        | 23.60                | 4,800             | 5,600  |  |
| 55                      | 110 | 22 | 1.5                     | 1212KTNGC3       | H212   | 30.00        | 11.60                | 5,600             | 6,700  |  |
|                         | 110 | 28 | 1.5                     | 2212EKTNGC3      | H312   | 47.50        | 16.60                | 5,300             | 6,300  |  |
|                         | 130 | 31 | 2.0                     | 1312KJC3         | H312   | 57.50        | 20.80                | 4,800             | 5,600  |  |
|                         | 130 | 46 | 2.0                     | 2312KJC3         | H2312  | 88.50        | 28.30                | 4,300             | 5,300  |  |
| 60                      | 120 | 23 | 1.5                     | 1213KTNGC3       | H213   | 31.00        | 12.50                | 5,300             | 6,300  |  |
|                         | 120 | 31 | 1.5                     | 2213EKTNGC3      | H313   | 57.00        | 19.30                | 4,500             | 5,300  |  |
|                         | 140 | 33 | 2.1                     | 1313KJC3         | H313   | 62.50        | 22.90                | 4,300             | 5,300  |  |
|                         | 140 | 48 | 2.1                     | 2313KJC3         | H2313  | 96.50        | 32.50                | 4,000             | 4,800  |  |
| 65                      | 130 | 25 | 1.5                     | 1215KTNGC3       | H215   | 39.00        | 15.60                | 4,800             | 5,600  |  |
|                         | 130 | 31 | 1.5                     | 2215KJC3         | H315   | 44.50        | 17.80                | 4,300             | 5,300  |  |
|                         | 160 | 37 | 2.1                     | 1315KJC3         | H315   | 80.00        | 30.00                | 3,800             | 4,500  |  |
|                         | 160 | 55 | 2.1                     | 2315KJC3         | H2315  | 125.00       | 43.00                | 3,400             | 4,300  |  |



|  | Dimensions (mm) |                |                | Abutment dimensions (mm) |                |                |                |                | Factors |                |                |                | Weight  |        | Abbreviation |
|--|-----------------|----------------|----------------|--------------------------|----------------|----------------|----------------|----------------|---------|----------------|----------------|----------------|---------|--------|--------------|
|  | d <sub>3</sub>  | B <sub>1</sub> | B <sub>2</sub> | d <sub>a</sub>           | d <sub>b</sub> | D <sub>a</sub> | B <sub>a</sub> | r <sub>a</sub> | e       | Y <sub>1</sub> | Y <sub>2</sub> | Y <sub>0</sub> | Bearing | Sleeve |              |
|  |                 |                |                | max                      | min            | max            | min            | max            |         | Fa/fr ≤ e      | Fa/fr > e      |                | kg      |        |              |
|  | 32              | 24             | 7              | 27                       | 23             | 42.0           | 5              | 1.0            | 0.28    | 2.2            | 3.5            | 2.3            | 0.12    | 0.041  | 1204KTNGC3   |
|  | 32              | 28             | 7              | 27                       | 23             | 42.0           | 5              | 1.0            | 0.44    | 1.5            | 2.2            | 1.5            | 0.14    | 0.045  | 2204EKTNGC3  |
|  | 32              | 28             | 7              | 30                       | 23             | 45.5           | 8              | 1.0            | 0.29    | 2.2            | 3.3            | 2.3            | 0.16    | 0.045  | 1304KTNGC3   |
|  | 32              | 31             | 7              | 28                       | 24             | 45.5           | 5              | 1.0            | 0.51    | 1.2            | 1.9            | 1.3            | 0.21    | 0.049  | 2304KJC3     |
|  | 38              | 26             | 8              | 32                       | 28             | 47.0           | 5              | 1.0            | 0.27    | 2.4            | 3.7            | 2.5            | 0.14    | 0.070  | 1205KTNGC3   |
|  | 38              | 29             | 8              | 32                       | 28             | 47.0           | 5              | 1.0            | 0.35    | 1.8            | 2.8            | 1.9            | 0.16    | 0.075  | 2205EKTNGC3  |
|  | 38              | 29             | 8              | 35                       | 28             | 55.5           | 6              | 1.0            | 0.28    | 2.3            | 3.5            | 2.4            | 0.26    | 0.075  | 1305KTNGC3   |
|  | 38              | 35             | 8              | 34                       | 30             | 55.5           | 5              | 1.0            | 0.48    | 1.3            | 2.0            | 1.4            | 0.34    | 0.087  | 2305KTNGC3   |
|  | 45              | 27             | 8              | 38                       | 33             | 57.0           | 5              | 1.0            | 0.25    | 2.5            | 3.9            | 2.7            | 0.22    | 0.100  | 1206KTNGC3   |
|  | 45              | 31             | 8              | 39                       | 33             | 57.0           | 5              | 1.0            | 0.30    | 2.1            | 3.3            | 2.2            | 0.24    | 0.110  | 2206EKTNGC3  |
|  | 45              | 31             | 8              | 42                       | 33             | 65.5           | 6              | 1.0            | 0.26    | 2.4            | 3.7            | 2.5            | 0.38    | 0.110  | 1306KTNGC3   |
|  | 45              | 38             | 8              | 40                       | 35             | 65.5           | 5              | 1.0            | 0.45    | 1.4            | 2.2            | 1.5            | 0.49    | 0.130  | 2306KTNGC3   |
|  | 52              | 29             | 9              | 45                       | 38             | 65.5           | 5              | 1.0            | 0.22    | 2.8            | 4.3            | 2.9            | 0.32    | 0.130  | 1207KTNGC3   |
|  | 52              | 35             | 9              | 44                       | 39             | 65.5           | 5              | 1.0            | 0.30    | 2.1            | 3.3            | 2.2            | 0.40    | 0.140  | 2207EKTNGC3  |
|  | 52              | 35             | 9              | 49                       | 39             | 72.0           | 7              | 1.5            | 0.26    | 2.5            | 3.8            | 2.6            | 0.50    | 0.140  | 1307KTNGC3   |
|  | 52              | 43             | 9              | 45                       | 40             | 72.0           | 5              | 1.5            | 0.47    | 1.4            | 2.1            | 1.4            | 0.66    | 0.170  | 2307KTNGC3   |
|  | 58              | 31             | 10             | 52                       | 43             | 73.5           | 6              | 1.0            | 0.22    | 2.9            | 4.5            | 3.0            | 0.41    | 0.170  | 1208KTNGC3   |
|  | 58              | 36             | 10             | 50                       | 44             | 73.5           | 6              | 1.0            | 0.26    | 2.4            | 3.8            | 2.5            | 0.49    | 0.190  | 2208EKTNGC3  |
|  | 58              | 36             | 10             | 55                       | 44             | 82.0           | 6              | 1.5            | 0.25    | 2.5            | 3.9            | 2.6            | 0.70    | 0.190  | 1308KTNGC3   |
|  | 58              | 46             | 10             | 51                       | 45             | 82.0           | 6              | 1.5            | 0.43    | 1.5            | 2.3            | 1.5            | 0.90    | 0.220  | 2308KTNGC3   |
|  | 65              | 33             | 11             | 57                       | 48             | 78.5           | 6              | 1.0            | 0.21    | 3.0            | 4.7            | 3.2            | 0.46    | 0.230  | 1209KTNGC3   |
|  | 65              | 39             | 11             | 56                       | 50             | 78.5           | 8              | 1.0            | 0.26    | 2.4            | 3.8            | 2.5            | 0.53    | 0.250  | 2209EKTNGC3  |
|  | 65              | 39             | 11             | 61                       | 50             | 92.0           | 6              | 1.5            | 0.25    | 2.5            | 3.9            | 2.6            | 0.94    | 0.250  | 1309KTNGC3   |
|  | 65              | 50             | 11             | 57                       | 50             | 92.0           | 6              | 1.5            | 0.43    | 1.5            | 2.3            | 1.6            | 1.20    | 0.280  | 2309KTNGC3   |
|  | 70              | 35             | 12             | 62                       | 53             | 83.5           | 6              | 1.0            | 0.20    | 3.2            | 4.9            | 3.3            | 0.52    | 0.270  | 1210KTNGC3   |
|  | 70              | 42             | 12             | 61                       | 55             | 83.5           | 10             | 1.0            | 0.24    | 2.6            | 4.1            | 2.7            | 0.58    | 0.300  | 2210EKTNGC3  |
|  | 70              | 42             | 12             | 68                       | 55             | 101.0          | 6              | 2.0            | 0.24    | 2.6            | 4.0            | 2.7            | 1.20    | 0.300  | 1310KTNGC3   |
|  | 70              | 55             | 12             | 63                       | 56             | 101.0          | 6              | 2.0            | 0.43    | 1.5            | 2.3            | 1.5            | 1.60    | 0.360  | 2310KTNGC3   |
|  | 75              | 37             | 12             | 69                       | 60             | 92.0           | 7              | 1.5            | 0.19    | 3.3            | 5.1            | 3.5            | 0.69    | 0.310  | 1211KTNGC3   |
|  | 75              | 45             | 12             | 68                       | 60             | 92.0           | 11             | 1.5            | 0.22    | 2.9            | 4.5            | 2.1            | 0.79    | 0.390  | 2211EKTNGC3  |
|  | 75              | 45             | 12             | 74                       | 60             | 111.0          | 7              | 2.0            | 0.24    | 2.7            | 4.1            | 2.8            | 1.55    | 0.390  | 1311KTNGC3   |
|  | 75              | 59             | 12             | 69                       | 61             | 111.0          | 7              | 2.0            | 0.42    | 1.5            | 2.3            | 1.6            | 2.05    | 0.420  | 2311KTNGC3   |
|  | 80              | 38             | 13             | 75                       | 64             | 102.0          | 7              | 1.5            | 0.18    | 3.5            | 5.4            | 3.6            | 0.90    | 0.350  | 1212KTNGC3   |
|  | 80              | 47             | 13             | 73                       | 65             | 102.0          | 9              | 1.5            | 0.23    | 2.7            | 4.2            | 2.8            | 1.10    | 0.390  | 2212EKTNGC3  |
|  | 80              | 47             | 13             | 83                       | 65             | 119.0          | 7              | 2.0            | 0.23    | 2.8            | 4.3            | 2.9            | 1.95    | 0.390  | 1312KJC3     |
|  | 80              | 62             | 13             | 74                       | 66             | 119.0          | 7              | 2.0            | 0.40    | 1.6            | 2.4            | 1.7            | 2.60    | 0.490  | 2312KJC3     |
|  | 85              | 40             | 14             | 83                       | 70             | 112.0          | 7              | 1.5            | 0.18    | 3.6            | 5.5            | 3.7            | 1.15    | 0.400  | 1213KTNGC3   |
|  | 85              | 50             | 14             | 79                       | 70             | 112.0          | 9              | 1.5            | 0.23    | 2.8            | 4.3            | 2.9            | 1.45    | 0.460  | 2213EKTNGC3  |
|  | 85              | 50             | 14             | 89                       | 70             | 129.0          | 7              | 2.0            | 0.23    | 2.8            | 4.3            | 2.9            | 2.45    | 0.460  | 1313KJC3     |
|  | 85              | 65             | 14             | 82                       | 72             | 129.0          | 7              | 2.0            | 0.39    | 1.6            | 2.5            | 1.7            | 3.25    | 0.550  | 2313KJC3     |
|  | 98              | 43             | 15             | 92                       | 80             | 122.0          | 7              | 1.5            | 0.17    | 3.6            | 5.6            | 3.8            | 1.35    | 0.710  | 1215KTNGC3   |
|  | 98              | 55             | 15             | 90                       | 80             | 122.0          | 13             | 1.5            | 0.25    | 2.5            | 3.9            | 2.6            | 1.60    | 0.830  | 2215KJC3     |
|  | 98              | 55             | 15             | 100                      | 80             | 149.0          | 7              | 2.0            | 0.22    | 2.8            | 4.4            | 3.0            | 3.55    | 0.830  | 1315KJC3     |
|  | 98              | 73             | 15             | 94                       | 82             | 149.0          | 7              | 2.0            | 0.38    | 1.6            | 2.6            | 1.7            | 5.15    | 1.050  | 2315KJC3     |

# Self Aligning Ball Bearings


Sealed on both sides | Bore 12 – 65 mm

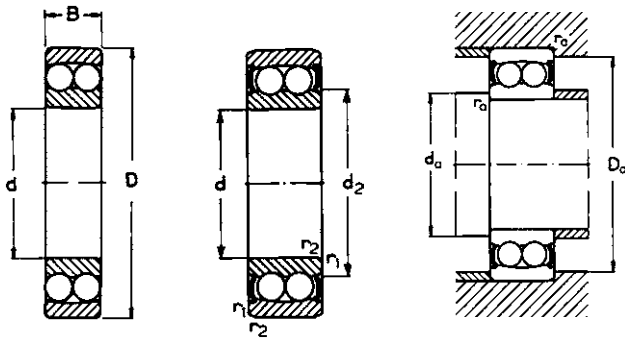

| Dimensions |     |    |                         | Abbreviation     |               | Load ratings |                      | Speed limits<br>Grease | Abutment dimensions |                    |                    | Factors |                |                |                | Weight | Abbreviation |
|------------|-----|----|-------------------------|------------------|---------------|--------------|----------------------|------------------------|---------------------|--------------------|--------------------|---------|----------------|----------------|----------------|--------|--------------|
| d<br>Shaft | D   | B  | r <sub>1,2</sub><br>min | Cylindrical bore | Tapered bore  | dyn. C       | stat. C <sub>0</sub> |                        | d <sub>a</sub> min  | D <sub>a</sub> max | r <sub>a</sub> max | e       | Y <sub>1</sub> | Y <sub>2</sub> | Y <sub>0</sub> |        |              |
| mm         |     |    |                         |                  |               | kN           |                      | min <sup>-1</sup>      | mm                  |                    |                    |         | Fa/Fr<br>≤ e   | Fa/fr<br>> e   |                | kg     |              |
| 12         | 32  | 14 | 0.6                     | 2201-2RSTNG      | —             | 5.60         | 1.27                 | 16,000                 | 16.0                | 28.0               | 0.6                | 0.37    | 1.7            | 2.6            | 1.8            | 0.06   | 2201-2RSTNG  |
| 15         | 35  | 14 | 0.6                     | 2202-2RSTNG      | —             | 7.50         | 1.76                 | 15,000                 | 19.0                | 31.0               | 0.6                | 0.34    | 1.9            | 2.9            | 2.0            | 0.06   | 2202-2RSTNG  |
|            | 42  | 17 | 1.0                     | 2302-2RSTN       | —             | 9.50         | 2.28                 | 15,000                 | 20.0                | 37.0               | 1.0                | 0.35    | 1.8            | 2.8            | 1.9            | 0.13   | 2302-2RSTN   |
| 17         | 40  | 16 | 0.6                     | 2203-2RSTNG      | —             | 8.00         | 2.04                 | 14,000                 | 21.0                | 36.0               | 0.6                | 0.33    | 1.9            | 3.0            | 2.0            | 0.10   | 2203-2RSTNG  |
|            | 47  | 19 | 1.0                     | 2303-2RSTN       | —             | 12.50        | 3.20                 | 11,000                 | 22.0                | 42.0               | 1.0                | 0.32    | 1.9            | 3.0            | 2.0            | 0.18   | 2303-2RSTN   |
| 20         | 47  | 18 | 1.0                     | 2204-2RSTNG      | 2204K2RSTNGC3 | 10.00        | 2.65                 | 11,000                 | 25.0                | 42.0               | 1.0                | 0.28    | 2.2            | 3.5            | 2.3            | 0.16   | 2204-2RSTNG  |
|            | 52  | 21 | 1.1                     | 2304-2RSTNG      | 2304K2RSTNGC3 | 12.50        | 3.35                 | 10,000                 | 26.5                | 45.5               | 1.0                | 0.29    | 2.2            | 3.3            | 2.3            | 0.24   | 2304-2RSTNG  |
| 25         | 52  | 18 | 1.0                     | 2205-2RSTNG      | 2205K2RSTNGC3 | 12.20        | 3.35                 | 9,500                  | 30.0                | 47.0               | 1.0                | 0.27    | 2.4            | 3.7            | 2.5            | 0.17   | 2205-2RSTNG  |
|            | 62  | 24 | 1.1                     | 2305-2RSTNG      | 2305K2RSTNGC3 | 18.00        | 5.00                 | 8,000                  | 31.5                | 55.5               | 1.0                | 0.28    | 2.3            | 3.5            | 2.4            | 0.38   | 2305-2RSTNG  |
| 30         | 62  | 20 | 1.0                     | 2206-2RSTNG      | 2206K2RSTNGC3 | 15.60        | 4.65                 | 8,000                  | 35.0                | 57.0               | 1.0                | 0.25    | 2.5            | 3.9            | 2.7            | 0.28   | 2206-2RSTNG  |
|            | 72  | 27 | 1.1                     | 2306-2RSTNG      | 2306K2RSTNGC3 | 21.20        | 6.30                 | 6,700                  | 36.5                | 65.5               | 1.0                | 0.26    | 2.4            | 3.7            | 2.5            | 0.57   | 2306-2RSTNG  |
| 35         | 72  | 23 | 1.1                     | 2207-2RSTNG      | 2207K2RSTNGC3 | 16.00        | 5.20                 | 7,000                  | 41.4                | 65.5               | 1.0                | 0.22    | 2.8            | 4.3            | 2.9            | 0.45   | 2207-2RSTNG  |
|            | 80  | 31 | 1.5                     | 2307-2RSTNG      | 2307K2RSTNGC3 | 25.00        | 8.00                 | 6,000                  | 43.0                | 72.0               | 1.5                | 0.26    | 2.5            | 3.8            | 2.6            | 0.79   | 2307-2RSTNG  |
| 40         | 80  | 23 | 1.1                     | 2208-2RSTNG      | 2208K2RSTNGC3 | 19.30        | 6.55                 | 6,300                  | 46.5                | 73.5               | 1.0                | 0.22    | 2.9            | 4.5            | 3.0            | 0.55   | 2208-2RSTNG  |
|            | 90  | 33 | 1.5                     | 2308-2RSTNG      | 2308K2RSTNGC3 | 29.00        | 9.65                 | 5,300                  | 48.0                | 82.0               | 1.5                | 0.25    | 2.5            | 3.9            | 2.6            | 0.05   | 2308-2RSTNG  |
| 45         | 85  | 23 | 1.1                     | 2209-2RSTNG      | 2209K2RSTNGC3 | 22.00        | 7.35                 | 5,600                  | 51.5                | 78.5               | 1.0                | 0.21    | 3.0            | 4.7            | 3.2            | 0.58   | 2209-2RSTNG  |
|            | 100 | 36 | 1.5                     | 2309-2RSTNG      | 2309K2RSTNGC3 | 38.00        | 12.90                | 4,800                  | 53.0                | 92.0               | 1.5                | 0.25    | 2.5            | 3.9            | 2.6            | 0.40   | 2309-2RSTNG  |
| 50         | 90  | 23 | 1.1                     | 2210-2RSTNG      | 2210K2RSTNGC3 | 22.80        | 8.15                 | 5,300                  | 56.5                | 83.5               | 1.0                | 0.20    | 3.2            | 4.9            | 3.3            | 0.63   | 2210-2RSTNG  |
|            | 100 | 40 | 2.0                     | 2310-2RSTNG      | 2310K2RSTNGC3 | 41.50        | 14.30                | 4,300                  | 59.0                | 101.0              | 2.0                | 0.24    | 2.6            | 4.0            | 2.7            | 1.89   | 2310-2RSTNG  |
| 55         | 100 | 25 | 1.5                     | 2211-2RSTNG      | 2211K2RSTNGC3 | 27.00        | 10.00                | 4,800                  | 63.0                | 92.0               | 1.5                | 0.19    | 3.3            | 5.1            | 3.5            | 0.76   | 2211-2RSTNG  |
|            | 120 | 43 | 2.0                     | 2311-2RSTNG      | 2311K2RSTNGC3 | 51.00        | 18.00                | 3,800                  | 66.0                | 109.0              | 2.0                | 0.24    | 2.7            | 4.1            | 2.8            | 2.37   | 2311-2RSTNG  |
| 60         | 110 | 28 | 1.5                     | 2212-2RSTNG      | 2212K2RSTNGC3 | 30.00        | 11.60                | 4,300                  | 68.5                | 101.5              | 1.5                | 0.18    | 3.5            | 5.4            | 3.6            | 1.11   | 2212-2RSTNG  |
| 65         | 120 | 31 | 1.5                     | 2213-2RSTNG      | 2213K2RSTNGC3 | 31.00        | 12.40                | 4,000                  | 74.0                | 111.0              | 1.5                | 0.18    | 3.6            | 5.5            | 3.7            | 1.53   | 2213-2RSTNG  |

# Self Aligning Ball Bearings

With extended inner ring | Bore 20 – 60 mm

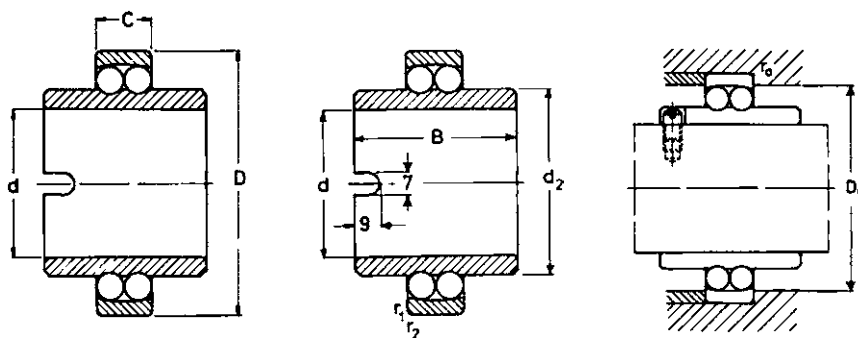


| Dimensions |     |    |                      | Abbreviation | Load ratings |                      | Speed limits<br>Grease | Dimensions     |    | Abutment dimensions |                    | Factors |                |                |                | Weight | Abbreviation |
|------------|-----|----|----------------------|--------------|--------------|----------------------|------------------------|----------------|----|---------------------|--------------------|---------|----------------|----------------|----------------|--------|--------------|
| d          | D   | B  | r <sub>1,2</sub> min |              | dyn. C       | stat. C <sub>0</sub> |                        | d <sub>2</sub> | B  | D <sub>a</sub> max  | r <sub>a</sub> max | e       | Y <sub>1</sub> | Y <sub>2</sub> | Y <sub>0</sub> |        |              |
| mm         |     |    |                      |              | kN           |                      | min <sup>-1</sup>      | mm             |    |                     |                    |         | Fa/Fr ≤ e      | Fa/fr > e      |                | kg     |              |
| 20         | 47  | 14 | 1.0                  | 11204TNG     | 10.0         | 2.65                 | 9,000                  | 29.2           | 40 | 42.0                | 1.0                | 0.28    | 2.2            | 3.5            | 2.3            | 0.18   | 11204TNG     |
|            | 52  | 15 | 1.0                  | 11304TNG     | 12.5         | 3.20                 | 8,500                  | 31.5           | 44 | 45.5                | 1.0                | 0.29    | 2.2            | 3.3            | 2.3            | 0.28   | 11304TNG     |
| 25         | 52  | 15 | 1.0                  | 11205TNG     | 12.2         | 3.35                 | 8,000                  | 33.3           | 44 | 47.0                | 1.0                | 0.27    | 2.4            | 3.7            | 2.5            | 0.22   | 11205TNG     |
|            | 62  | 17 | 1.0                  | 11305TNG     | 18.0         | 5.00                 | 6,700                  | 38.0           | 48 | 55.5                | 1.0                | 0.28    | 2.3            | 3.5            | 2.4            | 0.43   | 11305TNG     |
| 30         | 62  | 16 | 1.0                  | 11206TNG     | 15.6         | 4.65                 | 6,700                  | 40.1           | 48 | 57.0                | 1.0                | 0.25    | 2.5            | 3.9            | 2.7            | 0.35   | 11206TNG     |
|            | 72  | 19 | 1.0                  | 11306TNG     | 21.2         | 6.30                 | 5,600                  | 45.0           | 52 | 65.5                | 1.0                | 0.26    | 2.4            | 3.7            | 2.5            | 0.64   | 11306TNG     |
| 35         | 72  | 17 | 1.1                  | 11207TNG     | 16.0         | 5.20                 | 5,600                  | 47.7           | 52 | 65.5                | 1.0                | 0.22    | 2.8            | 4.3            | 2.9            | 0.54   | 11207TNG     |
|            | 80  | 21 | 1.1                  | 11307TNG     | 25.0         | 8.00                 | 5,000                  | 51.7           | 56 | 72.0                | 1.0                | 0.26    | 2.5            | 3.8            | 2.6            | 0.85   | 11307TNG     |
| 40         | 80  | 18 | 1.1                  | 11208TNG     | 19.3         | 6.55                 | 5,000                  | 54.0           | 56 | 73.5                | 1.0                | 0.22    | 2.9            | 4.5            | 3.0            | 0.72   | 11208TNG     |
|            | 90  | 23 | 1.1                  | 11308TNG     | 29.0         | 9.65                 | 4,500                  | 57.7           | 58 | 82.0                | 1.0                | 0.25    | 2.5            | 3.9            | 2.6            | 1.12   | 11308TNG     |
| 45         | 85  | 19 | 1.1                  | 11209TNG     | 22.0         | 7.35                 | 4,500                  | 57.7           | 58 | 78.5                | 1.0                | 0.21    | 3.0            | 4.7            | 3.2            | 0.77   | 11209TNG     |
|            | 100 | 25 | 1.1                  | 11309TNG     | 38.0         | 12.90                | 3,800                  | 63.9           | 60 | 92.0                | 1.0                | 0.25    | 2.5            | 3.9            | 2.6            | 1.43   | 11309TNG     |
| 50         | 90  | 20 | 1.1                  | 11210TNG     | 22.8         | 8.15                 | 4,300                  | 62.7           | 58 | 83.5                | 1.0                | 0.20    | 3.2            | 4.9            | 3.3            | 0.85   | 11210TNG     |
|            | 110 | 27 | 1.1                  | 11310TNG     | 41.5         | 14.30                | 3,600                  | 70.3           | 62 | 83.5                | 1.0                | 0.24    | 2.6            | 4.0            | 2.7            | 1.82   | 11310TNG     |
| 55         | 100 | 21 | 1.5                  | 11211TNG     | 27.0         | 10.00                | 4,000                  | 70.3           | 60 | 92.0                | 1.5                | 0.19    | 3.3            | 5.1            | 3.5            | 1.17   | 11211TNG     |
| 60         | 110 | 22 | 1.5                  | 11212TNG     | 30.0         | 11.60                | 3,600                  | 78.0           | 62 | 102.0               | 1.5                | 0.18    | 3.5            | 5.4            | 3.6            | 1.50   | 11212TNG     |

**Note:** The bore tolerances do not comply with DIN 620. The bore tolerance corresponds to the tolerance zone J7.

# Self Aligning Ball Bearings

Sleeve | Shaft 20 – 50 mm

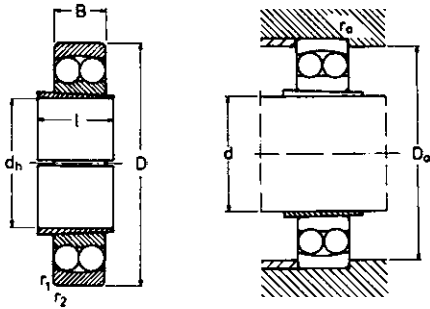

| Dimensions |                |    |    |    |                      | Abbreviation | Load ratings |                      | Speed limits      |        | Abutment dimensions |                    | Factors |                        |                        |                | Weight | Abbreviation |
|------------|----------------|----|----|----|----------------------|--------------|--------------|----------------------|-------------------|--------|---------------------|--------------------|---------|------------------------|------------------------|----------------|--------|--------------|
| d Shaft    | d <sub>h</sub> | D  | B  | I  | r <sub>1,2</sub> min |              | dyn. C       | stat. C <sub>0</sub> | Grease            | Oil    | D <sub>a</sub> max  | r <sub>a</sub> max | e       | Y <sub>1</sub>         | Y <sub>2</sub>         | Y <sub>0</sub> |        |              |
| mm         |                |    |    |    |                      |              | kN           |                      | min <sup>-1</sup> |        | mm                  |                    |         | F <sub>a</sub> /Fr ≤ e | F <sub>a</sub> /fr > e |                |        |              |
|            |                |    |    |    |                      |              |              |                      |                   |        |                     |                    |         |                        |                        |                | kg     |              |
| 20         | 20             | 47 | 14 | 23 | 1.0                  | 11504TNGC3   | 10.0         | 2.65                 | 15,000            | 18,000 | 41.0                | 1.0                | 0.28    | 2.2                    | 3.5                    | 2.3            | 0.120  | 11504TNGC3   |
| 25         | 25             | 52 | 15 | 25 | 1.0                  | 11505TNGC3   | 12.2         | 3.35                 | 13,000            | 16,000 | 46.5                | 1.0                | 0.27    | 2.4                    | 3.7                    | 2.5            | 0.144  | 11505TNGC3   |
| 30         | 30             | 62 | 16 | 25 | 1.0                  | 11506TNGC3   | 15.6         | 4.65                 | 11,000            | 14,000 | 56.5                | 1.0                | 0.25    | 2.5                    | 3.9                    | 2.7            | 0.227  | 11506TNGC3   |
| 35         | 35             | 72 | 17 | 26 | 1.1                  | 11507TNGC3   | 16.0         | 5.20                 | 9,500             | 12,000 | 65.0                | 1.0                | 0.22    | 2.8                    | 4.3                    | 2.9            | 0.335  | 11507TNGC3   |
| 40         | 40             | 80 | 18 | 27 | 1.1                  | 11508TNGC3   | 19.3         | 6.55                 | 8,500             | 10,000 | 73.0                | 1.0                | 0.22    | 2.9                    | 4.5                    | 3.0            | 0.435  | 11508TNGC3   |
| 45         | 45             | 85 | 19 | 28 | 1.1                  | 11509TNGC3   | 22.0         | 7.35                 | 7,500             | 9,000  | 78.0                | 1.0                | 0.21    | 3.0                    | 4.7                    | 3.2            | 0.480  | 11509TNGC3   |
| 50         | 50             | 90 | 20 | 30 | 1.1                  | 11510TNGC3   | 22.8         | 8.15                 | 7,000             | 8,500  | 83.0                | 1.0                | 0.20    | 3.2                    | 4.9                    | 3.3            | 0.540  | 11510TNGC3   |

**Note:** The bore of the inner ring and its 1:15 taper do not comply with DIN 616.


# Notes




Lined area for notes, consisting of 20 horizontal lines.

# Deep Groove Ball Bearings

Double Row

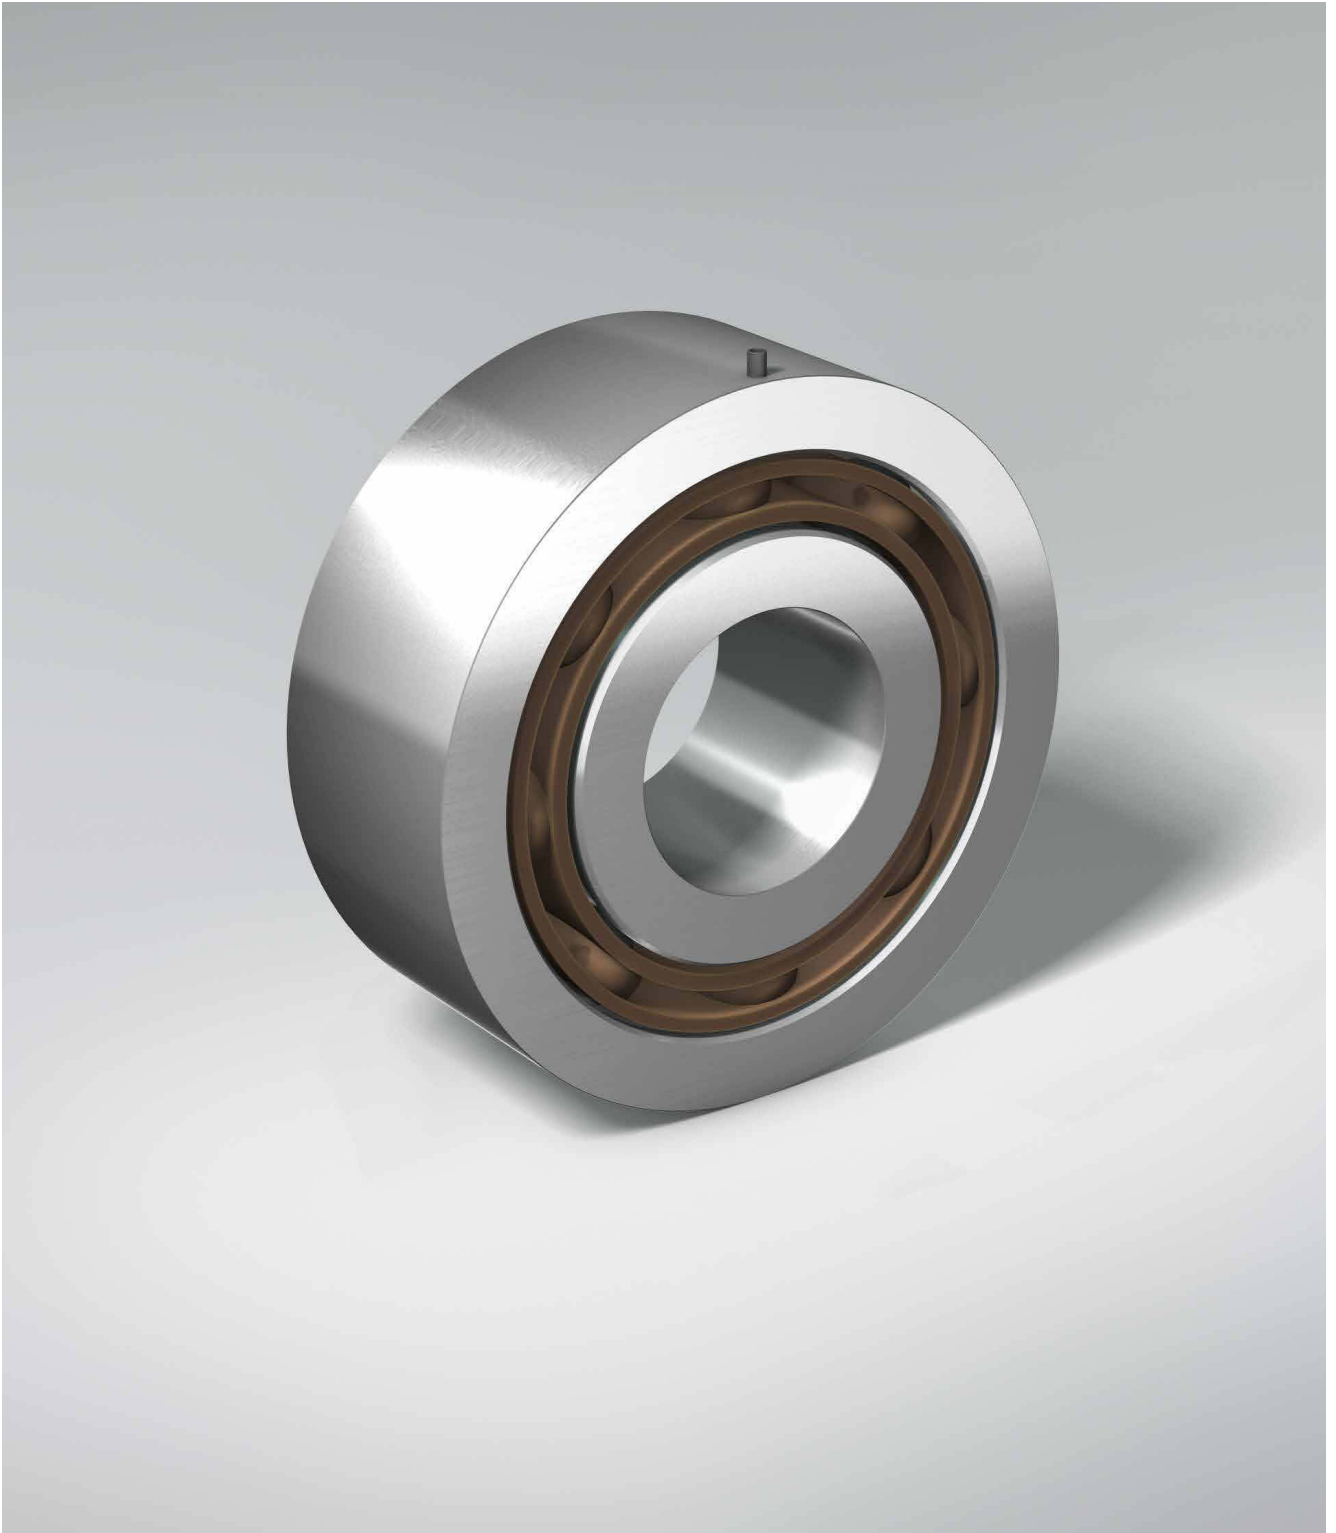

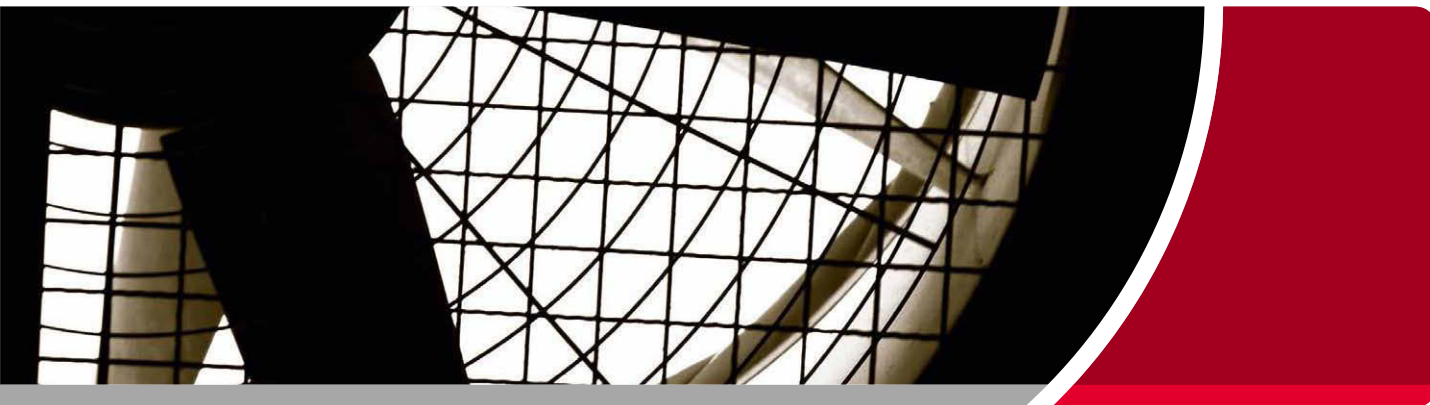

The structure and operation of Double Row Deep Groove Ball Bearings correspond to that of a pair of Single Row Deep Groove Ball Bearings. They should not be used where compensation for angular misalignment is required.

#### **Standards, dimensions**

DIN 625 Double Row Deep Groove Ball Bearings

#### **Tolerances**

The tolerances are stipulated in DIN 620.  
Double Row Deep Groove Ball Bearings are only manufactured to standard tolerance P0.

#### **Bearing clearance**

Double Row Deep Groove Ball Bearings are normally supplied with the standard clearance C0 "Normal".  
Other clearance groups are available on inquiry.

#### **Cages**

Double Row Deep Groove Ball Bearings are normally manufactured with snap cages made of glass-fiber reinforced Polyamide 66 and in a few cases, they are also provided with solid brass cages.

**M** solid cage made of brass,  
guided in the outer ring

**TNG** snap cage made of glass-fiber  
reinforced Polyamide 66

Bearings with cages made of glass-fiber reinforced polyamide are suitable for operating temperatures up to +120 °C.

# Deep Groove Ball Bearings


## Double Row

### Weights

The weights shown in the dimension tables apply to the open version of the Deep Groove Ball Bearings.

### Angular adjustment facility

Because of their internal structure, Double Row Deep Groove Ball Bearings do not facilitate angular adjustment. When using these bearings, they must not be out of alignment.

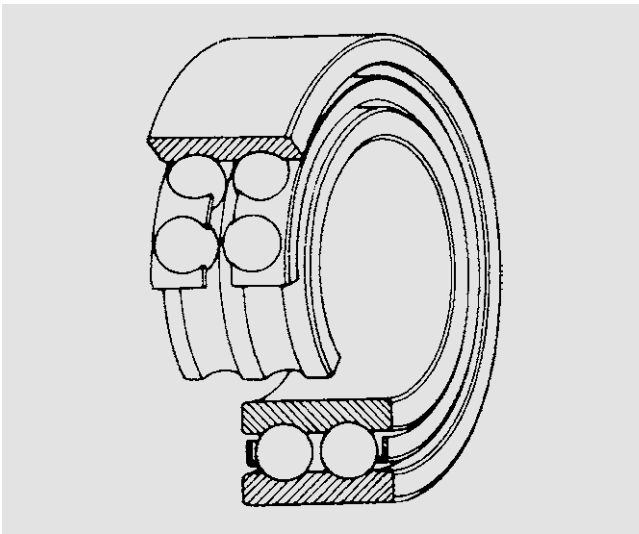

### Dynamic equivalent bearing load

$$P = F_r + F_a \quad (\text{Double Row Deep Groove Ball Bearings})$$

With Double Row Deep Groove Ball Bearings, it is essential that  $F_a \leq 0.3 \cdot F_r$

### Basic rating life

$$L_h = \frac{1,000,000}{n \cdot 60} \cdot \left( \frac{C}{P} \right)^3 \quad (\text{Running hours})$$

$$f_h = f_n \cdot \frac{C}{P} \quad (\text{Factors } f_h \text{ and } f_n, \text{ see tables on p. 40/41})$$

### Static equivalent bearing load

$$P_0 = 0.6 \cdot F_r + 0.5 \cdot F_a$$

(Single and Double Row Deep Groove Ball Bearings)

If  $P_0 \approx F_r$ , then calculation must be with  $P_0 = F_r$ .

With Double Row Deep Groove Ball Bearings, it is essential that  $F_a \leq 0.3 \cdot F_r$ .

### Basic static load rating

$$s_0 = \frac{C_0}{P_0}$$


## Radial bearing clearance of Single and Double Row Deep Groove Ball Bearings

| Rated size of bore d (mm) |       | C2  |     | C0 Standard |     | C3  |     | C4  |     | C5  |     |
|---------------------------|-------|-----|-----|-------------|-----|-----|-----|-----|-----|-----|-----|
| above                     | up to | min | max | min         | max | min | max | min | max | min | max |
| —                         | 10    | 0   | 7   | 2           | 13  | 8   | 23  | 14  | 29  | 20  | 37  |
| 10                        | 18    | 0   | 9   | 3           | 18  | 11  | 25  | 18  | 33  | 25  | 45  |
| 18                        | 24    | 0   | 10  | 5           | 20  | 13  | 28  | 20  | 36  | 28  | 48  |
| 24                        | 30    | 1   | 11  | 5           | 20  | 13  | 28  | 23  | 41  | 30  | 53  |
| 30                        | 40    | 1   | 11  | 6           | 20  | 15  | 33  | 28  | 46  | 40  | 64  |
| 40                        | 50    | 1   | 11  | 6           | 23  | 18  | 36  | 30  | 51  | 45  | 73  |
| 50                        | 65    | 1   | 15  | 8           | 28  | 23  | 43  | 38  | 61  | 55  | 90  |
| 65                        | 80    | 1   | 15  | 10          | 30  | 25  | 51  | 46  | 71  | 65  | 105 |
| 80                        | 100   | 1   | 18  | 12          | 36  | 30  | 58  | 53  | 84  | 75  | 120 |
| 100                       | 120   | 2   | 20  | 15          | 41  | 36  | 66  | 61  | 97  | 90  | 140 |
| 120                       | 140   | 2   | 23  | 18          | 48  | 41  | 81  | 71  | 114 | 105 | 160 |
| 140                       | 160   | 2   | 23  | 18          | 53  | 46  | 91  | 81  | 130 | 120 | 180 |
| 160                       | 180   | 2   | 25  | 20          | 61  | 53  | 102 | 91  | 147 | 135 | 200 |
| 180                       | 200   | 2   | 30  | 25          | 71  | 63  | 117 | 107 | 163 | 150 | 230 |
| 200                       | 225   | 2   | 35  | 28          | 82  | 73  | 132 | 120 | 187 | —   | —   |
| 225                       | 250   | 2   | 40  | 31          | 92  | 87  | 152 | 140 | 217 | —   | —   |
| 250                       | 280   | 2   | 45  | 36          | 97  | 97  | 162 | 152 | 237 | —   | —   |
| 280                       | 315   | 2   | 55  | 42          | 110 | 110 | 180 | 175 | 260 | —   | —   |
| 315                       | 355   | 3   | 60  | 50          | 120 | 120 | 200 | 200 | 290 | —   | —   |
| 355                       | 400   | 3   | 70  | 60          | 140 | 140 | 230 | 230 | 330 | —   | —   |

**Note:** Bearing clearances in  $\mu\text{m}$

# Deep Groove Ball Bearings

Double Row | Bore 10 – 90 mm

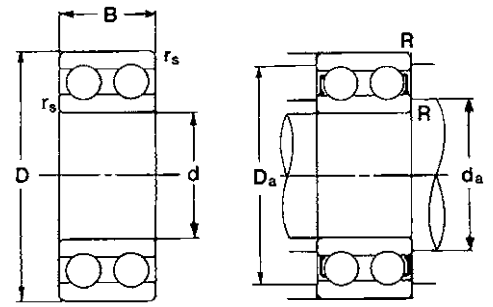

| Dimensions |     |    |                       | Abbreviation | Load ratings |                      | Speed limits      |        | Abutment dimensions   |                       |          | Weight | Abbreviation |
|------------|-----|----|-----------------------|--------------|--------------|----------------------|-------------------|--------|-----------------------|-----------------------|----------|--------|--------------|
| d          | D   | B  | r <sub>s</sub><br>min |              | dyn. C       | stat. C <sub>0</sub> | Grease            | Oil    | d <sub>a</sub><br>min | D <sub>a</sub><br>max | R<br>min |        |              |
| mm         |     |    |                       |              | kN           |                      | min <sup>-1</sup> |        | mm                    |                       |          | kg     |              |
| 10         | 30  | 14 | 0.6                   | 4200BTNG     | 9.15         | 5.2                  | 18,000            | 24,000 | 14.0                  | 26.0                  | 0.6      | 0.049  | 4200BTNG     |
| 12         | 32  | 14 | 0.6                   | 4201BTNG     | 9.30         | 5.5                  | 16,000            | 20,000 | 16.0                  | 28.0                  | 0.6      | 0.053  | 4201BTNG     |
| 15         | 35  | 14 | 0.6                   | 4202BTNG     | 10.4         | 6.7                  | 14,000            | 18,000 | 19.0                  | 31.0                  | 0.6      | 0.059  | 4202BTNG     |
|            | 42  | 17 | 1.0                   | 4302BTNG     | 14.6         | 9.2                  | 13,000            | 17,000 | 20.0                  | 37.0                  | 1.0      | 0.120  | 4302BTNG     |
| 17         | 40  | 16 | 0.6                   | 4203BTNG     | 14.6         | 9.5                  | 13,000            | 18,000 | 21.0                  | 36.0                  | 1.0      | 0.090  | 4203BTNG     |
|            | 47  | 19 | 1.0                   | 4303BTNG     | 19.6         | 13.2                 | 11,000            | 17,000 | 22.0                  | 42.0                  | 1.0      | 0.160  | 4303BTNG     |
| 20         | 47  | 18 | 1.0                   | 4204BTNG     | 18.0         | 12.7                 | 10,000            | 14,000 | 25.0                  | 42.0                  | 1.0      | 0.140  | 4204BTNG     |
|            | 52  | 21 | 1.1                   | 4304BTNG     | 23.2         | 16.0                 | 9,500             | 13,000 | 26.5                  | 45.5                  | 1.0      | 0.210  | 4304BTNG     |
| 25         | 52  | 18 | 1.0                   | 4205BTNG     | 19.3         | 14.6                 | 9,000             | 12,000 | 30.0                  | 47.0                  | 1.0      | 0.160  | 4205BTNG     |
|            | 62  | 24 | 1.1                   | 4305BTNG     | 31.5         | 22.4                 | 8,000             | 10,000 | 31.5                  | 55.5                  | 1.0      | 0.340  | 4305BTNG     |
| 30         | 62  | 20 | 1.0                   | 4206BTNG     | 26.0         | 20.8                 | 7,500             | 9,500  | 35.0                  | 57.0                  | 1.0      | 0.260  | 4206BTNG     |
|            | 72  | 27 | 1.1                   | 4306BTNG     | 40.0         | 30.5                 | 6,700             | 8,500  | 36.5                  | 65.5                  | 1.0      | 0.500  | 4306BTNG     |
| 35         | 72  | 23 | 1.1                   | 4207BTNG     | 32.0         | 26.0                 | 6,700             | 8,500  | 41.5                  | 65.5                  | 1.0      | 0.400  | 4207BTNG     |
|            | 80  | 31 | 1.5                   | 4307BTNG     | 51.0         | 38.0                 | 6,300             | 8,000  | 43.0                  | 72.0                  | 1.5      | 0.690  | 4307BTNG     |
| 40         | 80  | 23 | 1.1                   | 4208BTNG     | 34.0         | 30.0                 | 6,000             | 7,500  | 46.5                  | 73.5                  | 1.0      | 0.500  | 4208BTNG     |
|            | 90  | 33 | 1.5                   | 4308BTNG     | 63.0         | 48.0                 | 5,600             | 7,000  | 48.0                  | 82.0                  | 1.5      | 0.950  | 4308BTNG     |
| 45         | 85  | 23 | 1.1                   | 4209BTNG     | 36.0         | 33.5                 | 5,600             | 7,000  | 51.5                  | 78.5                  | 1.0      | 0.540  | 4209BTNG     |
|            | 100 | 36 | 1.5                   | 4309BTNG     | 72.0         | 60.0                 | 4,800             | 6,000  | 53.0                  | 92.0                  | 1.5      | 1.250  | 4309BTNG     |
| 50         | 90  | 23 | 1.1                   | 4210BTNG     | 37.5         | 36.5                 | 5,000             | 6,300  | 56.5                  | 83.5                  | 1.0      | 0.580  | 4210BTNG     |
|            | 110 | 40 | 2.0                   | 4310BTNG     | 90.0         | 75.0                 | 4,300             | 5,300  | 59.0                  | 101.0                 | 2.0      | 1.700  | 4310BTNG     |
| 55         | 100 | 25 | 1.5                   | 4211BTNG     | 43.0         | 43.0                 | 4,500             | 5,600  | 63.0                  | 92.0                  | 1.5      | 0.800  | 4211BTNG     |
|            | 120 | 43 | 2.0                   | 4311BTNG     | 104.0        | 90.0                 | 4,000             | 5,000  | 64.0                  | 111.0                 | 2.0      | 2.150  | 4311BTNG     |
| 60         | 110 | 28 | 1.5                   | 4212BTNG     | 57.0         | 58.5                 | 4,000             | 5,000  | 68.0                  | 102.0                 | 1.5      | 1.100  | 4212BTNG     |
|            | 130 | 46 | 2.1                   | 4312BTNG     | 120.0        | 106.0                | 3,600             | 4,500  | 71.0                  | 119.0                 | 2.0      | 2.650  | 4312BTNG     |
| 65         | 120 | 31 | 1.5                   | 4213BTNG     | 67.0         | 67.0                 | 3,800             | 4,800  | 73.0                  | 112.0                 | 1.5      | 1.450  | 4213BTNG     |
|            | 140 | 48 | 2.1                   | 4313BTNG     | 129.0        | 98.0                 | 3,600             | 4,500  | 76.0                  | 129.0                 | 2.0      | 3.250  | 4313BTNG     |
| 70         | 125 | 31 | 1.5                   | 4214BTNG     | 69.5         | 73.5                 | 3,600             | 4,500  | 78.0                  | 117.0                 | 1.5      | 1.500  | 4214BTNG     |
|            | 150 | 51 | 2.1                   | 4314BTNG     | 146.0        | 114.0                | 3,200             | 4,000  | 81.0                  | 139.0                 | 2.0      | 3.950  | 4314BTNG     |
| 75         | 130 | 31 | 1.5                   | 4215BTNG     | 73.5         | 80.0                 | 3,400             | 4,300  | 83.0                  | 122.0                 | 1.5      | 1.600  | 4215BTNG     |
|            | 160 | 55 | 2.1                   | 4315BTNG     | 170.0        | 134.0                | 3,000             | 3,800  | 86.0                  | 149.0                 | 2.0      | 5.380  | 4315BTNG     |
| 80         | 140 | 33 | 2.0                   | 4216BTNG     | 80.0         | 90.0                 | 3,200             | 4,000  | 89.0                  | 131.0                 | 2.0      | 2.000  | 4216BTNG     |
| 85         | 150 | 36 | 2.0                   | 4217BTNG     | 93.0         | 106.0                | 3,000             | 3,800  | 94.0                  | 141.0                 | 2.0      | 2.550  | 4217BTNG     |
| 90         | 160 | 40 | 2.0                   | 4218BTNG     | 112.0        | 122.0                | 2,800             | 3,600  | 99.0                  | 151.0                 | 2.0      | 3.200  | 4218BTNG     |


# Notes



Lined area for notes, consisting of 20 horizontal lines.

# Angular Contact Ball Bearings

Double Row

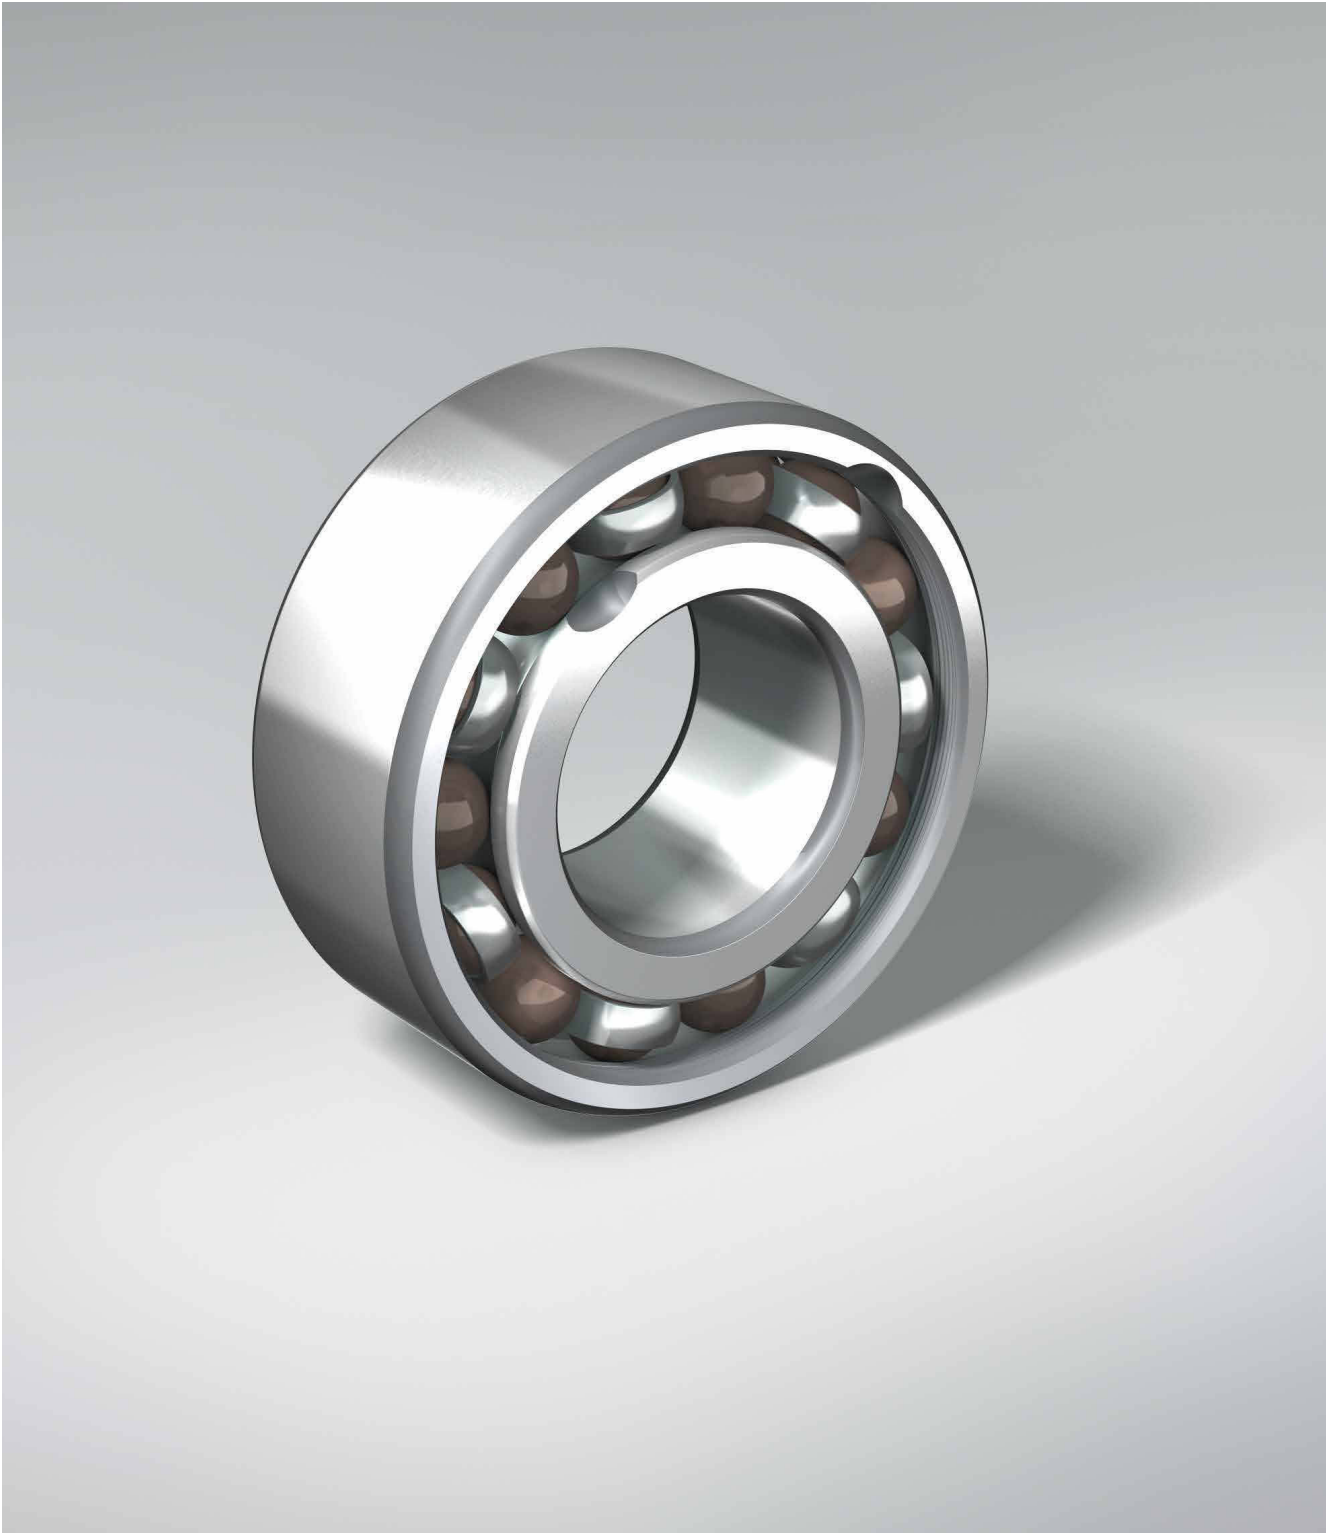



The structure and operation of double row, Angular Contact Ball Bearings correspond to that of a pair of back-to-back mounted Single Row Angular Contact Ball Bearings. They absorb radial and axial forces in both directions. The tilting moments can also be transferred.

NSK supplies Double Row Angular Contact Ball Bearings with two different contact angles. The Series 32..J and 33..J bearings have a contact angle of 32° and are fitted with a cage made of sheet steel. These bearings have filling slots on one side. The bearings must therefore be installed so that most of the axial force is transferred by the side without the slots.

The Series 32.. and 33.. bearings with the suffix "BTNG" have a contact angle of 25° and are provided with a cage made of glass-fibre reinforced Polyamide 66. These bearings do not have filling slots and can therefore transfer axial forces in both directions.

As well as the open version, NSK supplies Double Row Angular Contact Ball Bearings with the suffix "BTNG" also with shield or seals on one or both sides of the bearing. All Series 32..BTNG and 33..BTNG bearings are supplied with grease as standard. The version with the cage made of sheet-steel must be used for operating temperatures above 120°C.

#### **Tolerances**

The bearings are only manufactured to standard tolerance P0.

#### **Angular adjustment facility**

Double Row Angular Contact Ball Bearings do not facilitate angular adjustment.

#### **Bearing clearance**

The axial clearance of Double Row Angular Contact Ball Bearings is specified. The bearings are mass produced with axial clearance C0 "Normal". Other clearance groups are available on inquiry. The axial clearances can be found in the table on p. 31.

The radial clearance of Version "BTNG" is approx. 45 % of its axial clearance. The radial clearance of Version "J" is approx. 60 % of its axial clearance.

# Angular Contact Ball Bearings

## Double Row

### Seals

As well as the open version, NSK manufactures Double Row Angular Contact Ball Bearings with the suffix "BTNG" also with shield or seals on one or both sides of the bearing.

### Shields ZR

Shields ZR are sheet-steel discs which are fixed inside the bearing outer ring forming a small gap for the bearing inner ring. The bearings are available with one shield on one side of the bearing "ZR" or shields on both sides of the bearing "ZZR".

### Seals RSR

Seals RSR consist of nitrile rubber and are reinforced with a steel disc embedded in the rubber. The seals are fixed in the outer ring and seal against the inner ring with a friction sealing lip. The bearings are available with one seal on one side of the bearing "RSR" or seals on both sides of the bearing "2RSR".

### Lubrication

With Double Row Angular Contact Ball Bearings, the gap between the cage and the rings is relatively small. When lubricating with grease, it is therefore not easy for the user to introduce the grease which is required for the initial lubrication. For this reason, NSK also supplies non-sealed Double Row Angular Contact Ball Bearings pre-filled with grease at the factory. The grease which is supplied is a high-quality lithium-based grease with a temperature range of  $-30^{\circ}\text{C}$  to  $+120^{\circ}\text{C}$ . The grease used by NSK is compatible with all other mineral-oil-based greases.

There is no problem using oil lubrication on bearings which have been lubricated with grease by NSK, providing that the oil used is mineral-oil based. A special version of the bearing is necessary for use with synthetic oils or greases. In these cases, please consult NSK.

### Dynamic equivalent bearing load

With Series 32..BTNG and 33..BTNG:

$$P = F_r + 0.92 \cdot F_a \quad [\text{kN}] \quad \text{where } F_a/F_r \leq 0.68$$

$$P = 0.67 \cdot F_r + 1.41 \cdot F_a \quad [\text{kN}] \quad \text{where } F_a/F_r > 0.68$$

With Series 32..J and 33..J:

$$P = F_r + 0.73 \cdot F_a \quad [\text{kN}] \quad \text{where } F_a/F_r \leq 0.86$$

$$P = 0.62 \cdot F_r + 1.17 \cdot F_a \quad [\text{kN}] \quad \text{where } F_a/F_r > 0.86$$

### Basic rating life

$$L_h = \frac{1,000,000}{n \cdot 60} \cdot \left( \frac{C}{P} \right)^3 \quad (\text{Running hours})$$

### Static equivalent bearing load

$$f_h = f_n \cdot \frac{C}{P} \quad (\text{Factors } f_h \text{ and } f_n, \text{ see tables on p. 40/41})$$

With Series 32..BTNG and 33..BTNG:


$$P_0 = F_r + 0.76 \cdot F_a \quad [\text{kN}]$$

With Series 32..J and 33..J:

$$P_0 = F_r + 0.63 \cdot F_a \quad [\text{kN}]$$

### Basic static load rating

$$s_0 = \frac{C_0}{P_0}$$

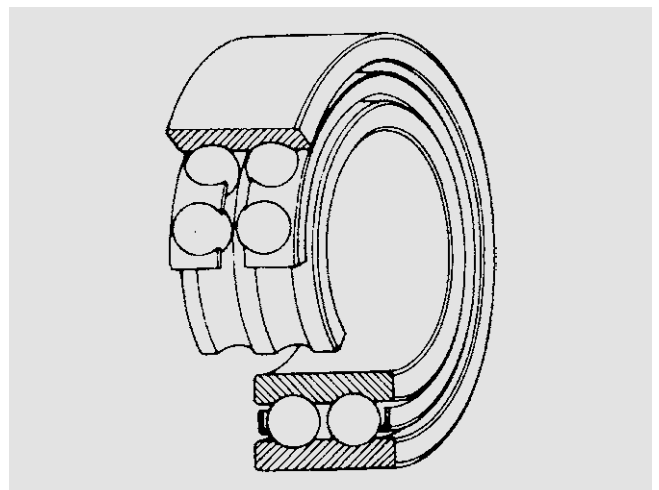

## Axial bearing clearance of Double Row Angular Contact Ball Bearings without load


| Rated size<br>of bore (mm) | above | 6  | 10 | 18 | 24 | 30 | 40 | 50 | 65 | 80  |
|----------------------------|-------|----|----|----|----|----|----|----|----|-----|
|                            | up to | 10 | 18 | 24 | 30 | 40 | 50 | 65 | 80 | 100 |
| <b>C2</b>                  | min.  | 1  | 1  | 2  | 2  | 2  | 2  | 3  | 3  | 3   |
|                            | max.  | 11 | 12 | 14 | 15 | 16 | 18 | 22 | 24 | 26  |
| <b>C0 Standard</b>         | min.  | 5  | 6  | 7  | 8  | 9  | 11 | 13 | 15 | 18  |
|                            | max.  | 21 | 23 | 25 | 27 | 29 | 33 | 36 | 40 | 46  |
| <b>C3</b>                  | min.  | 12 | 13 | 16 | 18 | 21 | 23 | 26 | 30 | 35  |
|                            | max.  | 28 | 31 | 34 | 37 | 40 | 44 | 48 | 54 | 63  |
| <b>C4</b>                  | min.  | 25 | 27 | 28 | 30 | 33 | 36 | 40 | 46 | 55  |
|                            | max.  | 45 | 47 | 48 | 50 | 54 | 58 | 63 | 71 | 83  |

**Note:** Bearing clearances in  $\mu\text{m}$

# Angular Contact Ball Bearings

Double Row | Bore 10 – 90 mm

| Dimensions |     |      |                      | Abbreviation |              |            | Load ratings |                      |  |
|------------|-----|------|----------------------|--------------|--------------|------------|--------------|----------------------|--|
| d          | D   | B    | r <sub>1,2</sub> min | Open         | with shields | with seals | dyn. C       | stat. C <sub>0</sub> |  |
| mm         |     |      |                      |              |              |            | kN           |                      |  |
| 10         | 30  | 14.0 | 0.6                  | 3200BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 7.80         | 4.55                 |  |
| 12         | 32  | 15.9 | 0.6                  | 3201BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 10.60        | 5.85                 |  |
|            | 37  | 19.0 | 1.0                  | 3301BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 14.50        | 8.20                 |  |
| 15         | 35  | 15.9 | 0.6                  | 3202BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 11.80        | 7.10                 |  |
|            | 42  | 19.0 | 1.0                  | 3302BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 16.30        | 10.00                |  |
| 17         | 40  | 17.5 | 0.6                  | 3203BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 14.60        | 9.00                 |  |
|            | 47  | 22.2 | 1.0                  | 3303BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 20.80        | 12.50                |  |
| 20         | 47  | 20.6 | 1.0                  | 3204BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 19.60        | 12.50                |  |
|            | 52  | 22.2 | 1.1                  | 3304BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 23.20        | 15.00                |  |
| 25         | 52  | 20.6 | 1.0                  | 3205BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 21.20        | 14.60                |  |
|            | 62  | 25.4 | 1.1                  | 3305BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 30.00        | 20.00                |  |
| 30         | 62  | 23.8 | 1.0                  | 3206BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 30.00        | 21.20                |  |
|            | 72  | 30.2 | 1.1                  | 3306BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 41.50        | 28.50                |  |
| 35         | 72  | 27.0 | 1.1                  | 3207BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 39.00        | 28.50                |  |
|            | 80  | 34.9 | 1.5                  | 3307BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 51.00        | 34.50                |  |
| 40         | 80  | 30.2 | 1.1                  | 3208BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 48.00        | 36.50                |  |
|            | 90  | 36.5 | 1.5                  | 3308BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 62.00        | 45.00                |  |
| 45         | 85  | 30.2 | 1.1                  | 3209BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 48.00        | 37.50                |  |
|            | 100 | 39.7 | 1.5                  | 3309BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 68.00        | 51.00                |  |
| 50         | 90  | 30.2 | 1.1                  | 3210BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 51.00        | 42.50                |  |
|            | 110 | 44.4 | 2.0                  | 3310BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 81.00        | 62.00                |  |
| 55         | 100 | 33.3 | 1.5                  | 3211BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 58.50        | 49.00                |  |
|            | 120 | 49.2 | 2.0                  | 3311BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 102.00       | 78.00                |  |
| 60         | 110 | 36.5 | 1.5                  | 3212BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 72.00        | 61.00                |  |
|            | 130 | 54.0 | 2.1                  | 3312BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 125.00       | 98.00                |  |
| 65         | 120 | 38.1 | 1.5                  | 3213BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 80.00        | 73.50                |  |
|            | 140 | 58.7 | 2.1                  | 3313BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 150.00       | 118.00               |  |
| 70         | 125 | 39.7 | 1.5                  | 3214BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 83.00        | 76.50                |  |
|            | 150 | 63.5 | 2.1                  | 3314BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 159.30       | 128.40               |  |
| 75         | 130 | 41.3 | 1.5                  | 3215BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 91.50        | 85.00                |  |
|            | 160 | 68.3 | 2.1                  | 3315BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 173.40       | 145.30               |  |
| 80         | 140 | 44.4 | 2.0                  | 3216BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 98.00        | 93.00                |  |
| 85         | 150 | 49.2 | 2.0                  | 3217BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 116.00       | 110.00               |  |
| 90         | 160 | 52.4 | 2.0                  | 3218BTNG     | ..B2ZRTNG    | ..B2RSRTNG | 124.60       | 120.30               |  |



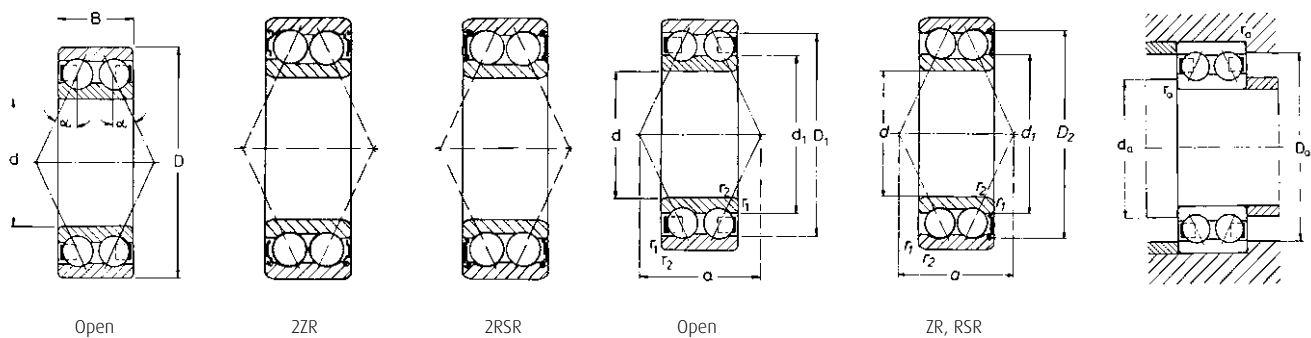


|  | Speed limits      |        | Dimensions (mm) |                                 |      | Abutment dimensions (mm) |                |                | Weight | Abbreviation |
|--|-------------------|--------|-----------------|---------------------------------|------|--------------------------|----------------|----------------|--------|--------------|
|  | Grease            | Oil    | d <sub>1</sub>  | D <sub>1</sub> , D <sub>2</sub> | a    | d <sub>a</sub>           | D <sub>a</sub> | r <sub>a</sub> |        |              |
|  | min <sup>-1</sup> |        |                 |                                 | min  | max                      | max            | max            |        |              |
|  | 16,000            | 22,000 | 17.9            | 23.9                            | 15.1 | 15                       | 25.0           | 0.6            | 0.043  | 3200BTNG     |
|  | 15,000            | 20,000 | 18.3            | 25.7                            | 16.6 | 17                       | 27.0           | 0.6            | 0.051  | 3201BTNG     |
|  | 10,500            | 11,500 | 21.1            | 30.4                            | 19.4 | 19                       | 32.0           | 1.0            | 0.090  | 3301BTNG     |
|  | 14,000            | 19,000 | 21.0            | 29.3                            | 18.0 | 20                       | 30.0           | 0.6            | 0.058  | 3202BTNG     |
|  | 11,000            | 16,000 | 25.6            | 34.2                            | 21.2 | 21                       | 36.0           | 1.0            | 0.112  | 3302BTNG     |
|  | 12,000            | 17,000 | 24.0            | 33.1                            | 20.5 | 22                       | 35.0           | 0.6            | 0.085  | 3203BTNG     |
|  | 10,000            | 15,000 | 26.2            | 37.7                            | 24.0 | 23                       | 41.0           | 1.0            | 0.161  | 3303BTNG     |
|  | 10,000            | 15,000 | 28.9            | 38.7                            | 24.2 | 26                       | 41.0           | 1.0            | 0.139  | 3204BTNG     |
|  | 9,000             | 13,000 | 31.2            | 42.6                            | 26.4 | 27                       | 45.0           | 1.0            | 0.197  | 3304BTNG     |
|  | 8,500             | 12,000 | 33.9            | 43.7                            | 26.5 | 31                       | 46.0           | 1.0            | 0.159  | 3205BTNG     |
|  | 7,500             | 10,000 | 37.1            | 50.0                            | 30.7 | 32                       | 55.0           | 1.0            | 0.316  | 3305BTNG     |
|  | 7,000             | 9,500  | 40.0            | 52.7                            | 31.4 | 36                       | 56.0           | 1.0            | 0.265  | 3206BTNG     |
|  | 6,300             | 8500   | 44.0            | 59.0                            | 36.2 | 37                       | 65.0           | 1.0            | 0.496  | 3306BTNG     |
|  | 6,300             | 8,500  | 47.2            | 60.4                            | 36.6 | 42                       | 65.0           | 1.0            | 0.412  | 3207BTNG     |
|  | 5,600             | 7,500  | 49.2            | 65.4                            | 41.5 | 44                       | 71.0           | 1.5            | 0.664  | 3307BTNG     |
|  | 5,600             | 7,500  | 52.9            | 67.9                            | 40.9 | 47                       | 73.0           | 1.0            | 0.550  | 3208BTNG     |
|  | 5,000             | 6700   | 55.4            | 74.3                            | 46.1 | 49                       | 81.0           | 1.5            | 0.905  | 3308BTNG     |
|  | 5,000             | 6,700  | 57.1            | 72.6                            | 43.2 | 52                       | 78.0           | 1.0            | 0.583  | 3209BTNG     |
|  | 4,500             | 6,000  | 62.2            | 81.6                            | 50.0 | 54                       | 91.0           | 1.5            | 1.210  | 3309BTNG     |
|  | 4,800             | 6,300  | 61.9            | 78.1                            | 45.5 | 57                       | 83.0           | 1.0            | 0.632  | 3210BTNG     |
|  | 4,000             | 5,300  | 68.2            | 89.6                            | 54.9 | 60                       | 100.0          | 2.0            | 1.600  | 3310BTNG     |
|  | 4,300             | 5,600  | 68.6            | 85.3                            | 49.9 | 64                       | 91.0           | 1.5            | 0.876  | 3211BTNG     |
|  | 3,800             | 5,000  | 75.2            | 98.4                            | 61.2 | 65                       | 110.0          | 2.0            | 2.110  | 3311BTNG     |
|  | 3,800             | 5,000  | 75.7            | 94.3                            | 55.1 | 69                       | 101.0          | 1.5            | 1.180  | 3212BTNG     |
|  | 3,400             | 4,500  | 81.2            | 108.7                           | 67.3 | 72                       | 118.0          | 2.0            | 2.700  | 3312BTNG     |
|  | 3,400             | 4,500  | 84.5            | 103.5                           | 59.8 | 74                       | 111.0          | 1.5            | 1.520  | 3213BTNG     |
|  | 3,200             | 4,300  | 88.2            | 118.0                           | 73.3 | 77                       | 128.0          | 2.0            | 3.390  | 3313BTNG     |
|  | 3,400             | 4,500  | 86.7            | 106.2                           | 61.6 | 79                       | 116.0          | 1.5            | 1.640  | 3214BTNG     |
|  | 3,000             | 4,000  | 94.7            | 125.0                           | 80.8 | 84                       | 135.0          | 2.1            | 4.900  | 3314BTNG     |
|  | 3,200             | 4,300  | 92.4            | 112.6                           | 65.0 | 89                       | 116.6          | 1.5            | 1.910  | 3215BTNG     |
|  | 2,800             | 3,800  | 101.4           | 133.0                           | 83.8 | 90                       | 143.0          | 2.1            | 5.700  | 3315BTNG     |
|  | 3,000             | 4,000  | 98.5            | 120.3                           | 69.0 | 91                       | 129.0          | 2.0            | 2.450  | 3216BTNG     |
|  | 2,800             | 3,800  | 106.4           | 128.5                           | 74.6 | 100                      | 135.0          | 2.0            | 3.300  | 3217BTNG     |
|  | 2,600             | 3,600  | 113.2           | 136.6                           | 78.9 | 109                      | 141.0          | 2.1            | 4.170  | 3218BTNG     |

# Angular Contact Ball Bearings

Double Row with filling slot | Bore 10 – 70 mm


| Dimensions |     |      |                      | Abbreviation | Load ratings |                      | Speed limits      |        |  |
|------------|-----|------|----------------------|--------------|--------------|----------------------|-------------------|--------|--|
| d          | D   | B    | r <sub>1,2</sub> min |              | dyn. C       | stat. C <sub>0</sub> | Grease            | Oil    |  |
| mm         |     |      |                      |              | kN           |                      | min <sup>-1</sup> |        |  |
| 10         | 30  | 14.0 | 0.6                  | 3200J        | 8.0          | 5.9                  | 17,000            | 24,000 |  |
| 12         | 32  | 15.9 | 0.6                  | 3201J        | 9.5          | 7.1                  | 15,000            | 20,000 |  |
| 15         | 35  | 15.9 | 0.6                  | 3202J        | 10.8         | 9.0                  | 13,000            | 18,000 |  |
|            | 42  | 19.0 | 1.0                  | 3302J        | 14.5         | 12.3                 | 12,000            | 17,000 |  |
| 17         | 40  | 17.5 | 0.6                  | 3203J        | 12.6         | 10.8                 | 12,000            | 17,000 |  |
|            | 47  | 22.2 | 1.0                  | 3303J        | 20.7         | 16.7                 | 10,000            | 15,000 |  |
| 20         | 47  | 20.6 | 1.0                  | 3204J        | 17.2         | 15.3                 | 10,000            | 15,000 |  |
|            | 52  | 22.2 | 1.1                  | 3304J        | 20.8         | 18.5                 | 9,500             | 14,000 |  |
| 25         | 52  | 20.6 | 1.0                  | 3205J        | 19.0         | 18.5                 | 8,500             | 12,000 |  |
|            | 62  | 25.4 | 1.1                  | 3305J        | 28.9         | 26.7                 | 7,500             | 10,000 |  |
| 30         | 62  | 23.8 | 1.0                  | 3206J        | 27.2         | 27.3                 | 7,000             | 9,500  |  |
|            | 72  | 30.2 | 1.1                  | 3306J        | 38.1         | 36.5                 | 6,300             | 8,500  |  |
| 35         | 72  | 27.0 | 1.1                  | 3207J        | 36.8         | 38.0                 | 6,300             | 8,500  |  |
|            | 80  | 34.9 | 1.5                  | 3307J        | 48.5         | 47.5                 | 5,600             | 7,500  |  |
| 40         | 80  | 30.2 | 1.1                  | 3208J        | 42.0         | 44.8                 | 5,600             | 7,500  |  |
|            | 90  | 36.5 | 1.5                  | 3308J        | 59.8         | 64.8                 | 4,800             | 6,300  |  |
| 45         | 85  | 30.2 | 1.1                  | 3209J        | 45.4         | 52.1                 | 5,000             | 6,700  |  |
|            | 100 | 39.7 | 1.5                  | 3309J        | 73.1         | 80.9                 | 4,300             | 5,600  |  |
| 50         | 90  | 30.2 | 1.1                  | 3210J        | 48.2         | 56.0                 | 4,800             | 6,300  |  |
|            | 110 | 44.4 | 2.0                  | 3310J        | 87.6         | 98.3                 | 4,000             | 5,300  |  |
| 55         | 100 | 33.3 | 1.5                  | 3211J        | 55.7         | 69.9                 | 4,300             | 5,600  |  |
|            | 120 | 49.2 | 2.0                  | 3311J        | 100.5        | 115.3                | 3,600             | 4,800  |  |
| 60         | 110 | 36.5 | 1.5                  | 3212J        | 71.4         | 86.1                 | 3,800             | 5,000  |  |
|            | 130 | 54.0 | 2.1                  | 3312J        | 116.1        | 135.3                | 3,400             | 4,500  |  |
| 65         | 120 | 38.1 | 1.5                  | 3213J        | 76.4         | 98.4                 | 3,600             | 4,800  |  |
|            | 140 | 58.7 | 2.1                  | 3313J        | 133.7        | 156.4                | 3,200             | 4,300  |  |
| 70         | 125 | 39.7 | 1.5                  | 3214J        | 84.2         | 109.5                | 3,200             | 4,300  |  |
|            | 150 | 63.5 | 2.1                  | 3314J        | 146.9        | 175.5                | 2,800             | 3,800  |  |



|  | Dimensions (mm) |                |     | Abutment dimensions (mm) |                |                | Weight<br>kg | Abbreviation |
|--|-----------------|----------------|-----|--------------------------|----------------|----------------|--------------|--------------|
|  | d <sub>1</sub>  | D <sub>1</sub> | a   | d <sub>a</sub>           | D <sub>a</sub> | r <sub>a</sub> |              |              |
|  |                 |                |     | max                      | max            | max            |              |              |
|  | 17.2            | 24.4           | 20  | 14                       | 26             | 0.6            | 0.052        | 3200J        |
|  | 19.3            | 26.9           | 22  | 16                       | 28             | 0.6            | 0.063        | 3201J        |
|  | 22.6            | 30.4           | 24  | 19                       | 31             | 0.6            | 0.072        | 3202J        |
|  | 24.9            | 34.4           | 27  | 21                       | 36             | 1.0            | 0.132        | 3302J        |
|  | 25.5            | 33.8           | 27  | 21                       | 36             | 0.6            | 0.103        | 3203J        |
|  | 27.6            | 40.0           | 31  | 23                       | 41             | 1.0            | 0.192        | 3303J        |
|  | 29.5            | 40.5           | 32  | 26                       | 41             | 1.0            | 0.168        | 3204J        |
|  | 32.0            | 43.0           | 34  | 27                       | 45             | 1.0            | 0.230        | 3304J        |
|  | 34.6            | 45.1           | 35  | 31                       | 46             | 1.0            | 0.194        | 3205J        |
|  | 38.5            | 52.5           | 40  | 32                       | 55             | 1.0            | 0.369        | 3305J        |
|  | 41.2            | 54.0           | 41  | 36                       | 56             | 1.0            | 0.316        | 3206J        |
|  | 45.4            | 61.3           | 47  | 37                       | 65             | 1.0            | 0.585        | 3306J        |
|  | 47.8            | 63.3           | 47  | 42                       | 65             | 1.0            | 0.484        | 3207J        |
|  | 50.8            | 69.2           | 54  | 44                       | 71             | 1.5            | 0.816        | 3307J        |
|  | 54.0            | 70.4           | 53  | 47                       | 73             | 1.0            | 0.654        | 3208J        |
|  | 59.4            | 80.1           | 59  | 49                       | 81             | 1.5            | 1.070        | 3308J        |
|  | 59.8            | 76.4           | 56  | 52                       | 78             | 1.0            | 0.709        | 3209J        |
|  | 66.2            | 89.1           | 64  | 54                       | 91             | 1.5            | 1.400        | 3309J        |
|  | 63.7            | 80.8           | 59  | 57                       | 83             | 1.0            | 0.764        | 3210J        |
|  | 72.5            | 96.4           | 73  | 60                       | 100            | 2.0            | 1.950        | 3310J        |
|  | 72.0            | 89.7           | 64  | 64                       | 91             | 1.5            | 1.050        | 3211J        |
|  | 80.2            | 106.4          | 80  | 65                       | 110            | 2.0            | 2.550        | 3311J        |
|  | 78.2            | 98.3           | 71  | 69                       | 101            | 1.5            | 1.400        | 3212J        |
|  | 86.2            | 115.0          | 86  | 72                       | 118            | 2.0            | 3.250        | 3312J        |
|  | 84.7            | 105.8          | 76  | 74                       | 111            | 1.5            | 1.750        | 3213J        |
|  | 92.5            | 123.0          | 94  | 77                       | 128            | 2.0            | 4.100        | 3313J        |
|  | 88.7            | 111.5          | 81  | 79                       | 116            | 1.5            | 1.900        | 3214J        |
|  | 98.5            | 131.0          | 101 | 82                       | 138            | 2.0            | 5.050        | 3314J        |

# Pulleys

---

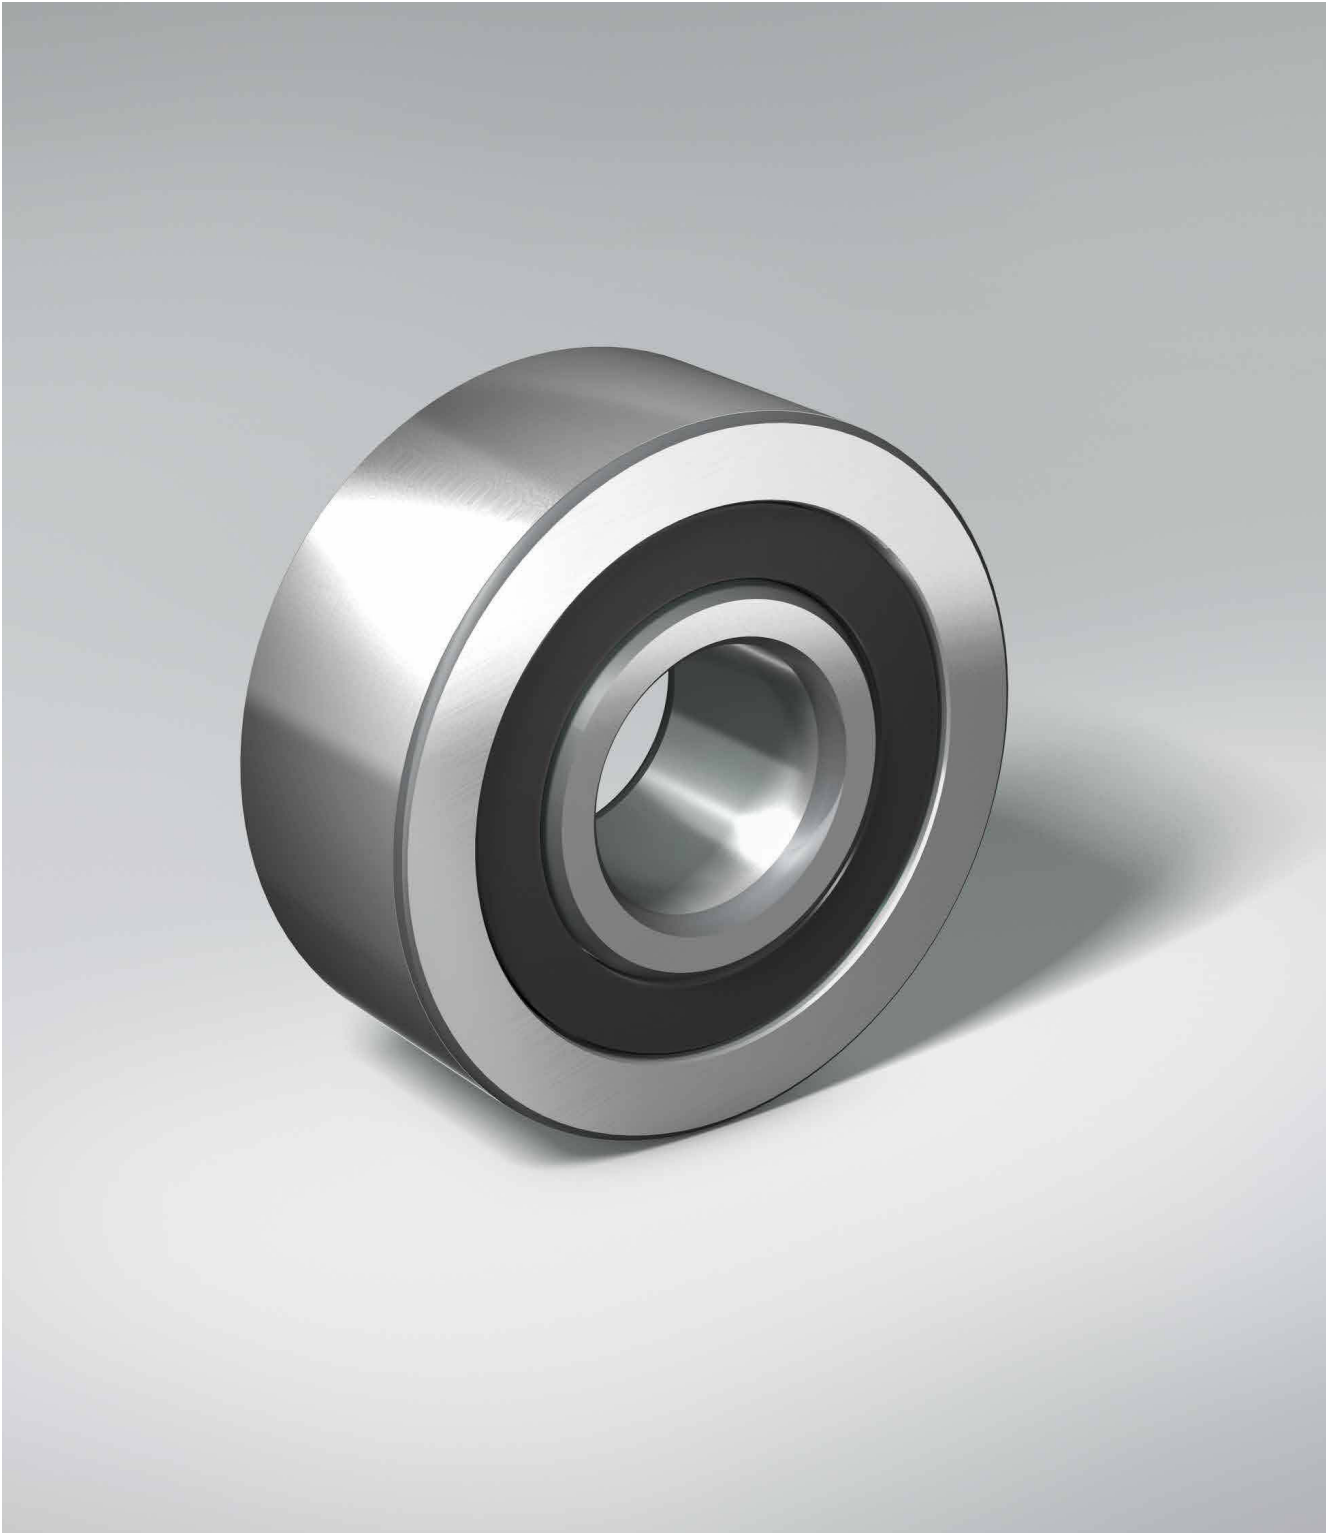



Pulleys are developments of Double Row Angular Contact Ball Bearings with a reinforced outer ring. The outer ring can be either of cylindrical or spherical design. The inner ring of these bearings is provided with lubrication holes. The bearings have no filling slot and absorb radial and axial forces in both directions.

The contact angle of these bearings is 25°. The bearing cage is made of glass-fibre reinforced Polyamide 66. Pulleys are supplied with seals or shields on both sides. They are normally supplied filled with grease at the factory. Special pulleys with galvanised bearing inner and outer rings are also available on enquiry.

#### Tolerances

The bearings are only manufactured to the standard tolerance P0.

#### Angular adjustment facility

Double Row Pulleys do not facilitate angular adjustment.

#### Bearing clearance

With Double Row Pulleys, the axial bearing clearance is specified. The bearings are normally supplied with axial clearance C0 "Normal". The axial clearances can be found in the table below. The radial clearances are approx. 45 % of the axial clearances

#### Cages

Double Row Pulleys are fitted with cages made of glass-fibre reinforced Polyamide 66.

#### Seals

NSK manufactures pulleys with seals and shields on both sides of the bearing.

#### Shields ZR

Shields are sheet-steel discs which are fixed inside the bearing outer ring forming a small gap for the bearing inner ring. The bearings are available with shields on both sides "ZZR".

#### Seals RSR

Seals RSR consist of nitrile rubber and are reinforced with a steel disc embedded in the rubber. The seals are fixed in the outer ring and seal against the inner ring with a friction sealing lip. The bearings are available with seals on both sides of the bearing "ZRSR".

### Axial clearance of Double Row Pulleys without load

| Rated size of bore (mm) | above | 6  | 10 | 18 | 24 | 30 | 40 | 50 | 65 |
|-------------------------|-------|----|----|----|----|----|----|----|----|
|                         | up to | 10 | 18 | 24 | 30 | 40 | 50 | 65 | 80 |
| C0 Standard             | min.  | 5  | 6  | 7  | 8  | 9  | 11 | 13 | 15 |
|                         | max.  | 21 | 23 | 25 | 27 | 29 | 33 | 36 | 40 |

**Note:** Bearing clearances in µm

# Pulleys

Bore 10 – 35 mm

## Lubrication

NSK supplies pulleys filled with grease at the factory. This is a high-quality lithiumbased grease with an admissible temperature range of -30 °C to +110 °C. The grease used by NSK is compatible with all other mineral-oil-based greases. The inner rings of the pulleys are provided with a lubrication hole so that bearings can be re-lubricated. With Version 2RSR, the grease must be pressed in slowly to avoid damaging the seals.

## Bearing load capacity

If the pulley is supported by a flat contact surface, only a small surface area of the outer ring of the pulleys comes into contact with the rolling plane. The elastic deformation of the outer ring reduces the load-bearing capacity of the pulley. In this case, the values specified in the "Pulley load ratings" table must be used in the calculation.

On the other hand, when installing the pulley in a housing bore, the "Bearing load ratings" apply which are also listed.

## Suffixes

|             |                                                  |
|-------------|--------------------------------------------------|
| <b>LZ</b>   | Pulley with cylindrical outer ring (prefix)      |
| <b>LB</b>   | Pulley with spherical outer ring (prefix)        |
| <b>B</b>    | 25° Contact angle                                |
| <b>S</b>    | Lubrication hole in inner ring                   |
| <b>TNG</b>  | Cage made of glass-fibre reinforced Polyamide 66 |
| <b>2ZR</b>  | Shields on both sides                            |
| <b>2RSR</b> | Seals on both sides                              |

## Dynamic equivalent bearing load

$$P = F_r + 0.92 \cdot F_a \quad [\text{kN}] \text{ where } F_a/F_r \leq 0.68$$
$$P = 0.67 \cdot F_r + 1.41 \cdot F_a \quad [\text{kN}] \text{ where } F_a/F_r > 0.68$$

## Basic rating life

$$L_h = \frac{1,000,000}{n \cdot 60} \cdot \left( \frac{C}{P} \right)^3 \quad (\text{Running hours})$$


$$f_h = f_n \cdot \frac{C}{P} \quad (\text{Factors } f_h \text{ and } f_n \text{ see tables on p. 40/41})$$

## Static equivalent bearing load

$$P_0 = F_r + 0.76 \cdot F_a \quad [\text{kN}]$$

## Basic static load rating

$$S_0 = \frac{C_0}{P_0}$$

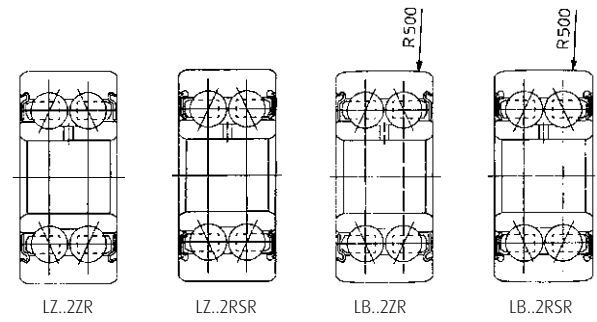

| Dimensions |    |      |                       | Abbreviation for                 |                                    | Load ratings [kN] |                |        |                | Speed limits | Weight |
|------------|----|------|-----------------------|----------------------------------|------------------------------------|-------------------|----------------|--------|----------------|--------------|--------|
| d          | D* | B    | r <sub>s</sub><br>min |                                  |                                    | Bearing           |                | Pulley |                |              |        |
|            |    |      |                       | Shields                          |                                    | Seals             |                | dyn.   | stat.          |              |        |
| mm         |    |      |                       |                                  |                                    | C                 | C <sub>0</sub> | C      | C <sub>0</sub> |              |        |
| 10         | 32 | 14.0 | 0.6                   | LZ3200B2ZRSTNG<br>LB3200B2ZRSTNG | LZ3200B2RSRSTNG<br>LB3200B2RSRSTNG | 7.8               | 4.55           | 7.45   | 4.15           | 16,000       | 0.061  |
| 12         | 35 | 15.9 | 0.6                   | LZ3201B2ZRSTNG<br>LB3201B2ZRSTNG | LZ3201B2RSRSTNG<br>LB3201B2RSRSTNG | 10.6              | 5.85           | 9.95   | 5.20           | 15,000       | 0.079  |
| 15         | 40 | 15.9 | 0.6                   | LZ3202B2ZRSTNG<br>LB3202B2ZRSTNG | LZ3202B2RSRSTNG<br>LB3202B2RSRSTNG | 11.8              | 7.10           | 11.00  | 6.45           | 13,000       | 0.100  |
| 17         | 47 | 17.5 | 0.6                   | LZ3203B2ZRSTNG<br>LB3203B2ZRSTNG | LZ3203B2RSRSTNG<br>LB3203B2RSRSTNG | 14.6              | 9.00           | 13.80  | 8.30           | 10,000       | 0.165  |
| 20         | 52 | 20.6 | 1.0                   | LZ3204B2ZRSTNG<br>LB3204B2ZRSTNG | LZ3204B2RSRSTNG<br>LB3204B2RSRSTNG | 19.6              | 12.50          | 18.30  | 11.00          | 9,000        | 0.210  |
| 25         | 62 | 20.6 | 1.0                   | LZ3205B2ZRSTNG<br>LB3205B2ZRSTNG | LZ3205B2RSRSTNG<br>LB3205B2RSRSTNG | 21.2              | 14.60          | 19.90  | 13.40          | 8,000        | 0.330  |
| 30         | 72 | 23.8 | 1.0                   | LZ3206B2ZRSTNG<br>LB3206B2ZRSTNG | LZ3206B2RSRSTNG<br>LB3206B2RSRSTNG | 30.0              | 21.20          | 27.90  | 18.60          | 7,100        | 0.500  |
| 35         | 80 | 27.0 | 1.0                   | LZ3207B2ZRSTNG<br>LB3207B2ZRSTNG | LZ3207B2RSRSTNG<br>LB3207B2RSRSTNG | 39.0              | 28.50          | 36.20  | 25.0           | 6,300        | 0.660  |

\* with spherical outer ring D 0.05 mm

# Life factors ( $f_h$ ) for ball bearings

| $f_h$ values for ball bearings $f_h = \sqrt[3]{\frac{L_h}{500}}$ |       |              |       |              |       |              |       |              |       |
|------------------------------------------------------------------|-------|--------------|-------|--------------|-------|--------------|-------|--------------|-------|
| $L_h$<br>(h)                                                     | $f_h$ | $L_h$<br>(h) | $f_h$ | $L_h$<br>(h) | $f_h$ | $L_h$<br>(h) | $f_h$ | $L_h$<br>(h) | $f_h$ |
| 100                                                              | 0.585 | 400          | 0.928 | 1,500        | 1.440 | 5,000        | 2.150 | 20,000       | 3.420 |
| 110                                                              | 0.604 | 420          | 0.944 | 1,600        | 1.470 | 5,500        | 2.220 | 22,000       | 3.530 |
| 120                                                              | 0.621 | 440          | 0.958 | 1,700        | 1.500 | 6,000        | 2.290 | 24,000       | 3.630 |
| 130                                                              | 0.638 | 460          | 0.973 | 1,800        | 1.530 | 6,500        | 2.350 | 26,000       | 3.730 |
| 140                                                              | 0.654 | 480          | 0.986 | 1,900        | 1.560 | 7,000        | 2.410 | 28,000       | 3.830 |
| 150                                                              | 0.669 | 500          | 1.000 | 2,000        | 1.590 | 7,500        | 2.470 | 30,000       | 3.910 |
| 160                                                              | 0.684 | 550          | 1.030 | 2,200        | 1.640 | 8,000        | 2.520 | 35,000       | 4.120 |
| 170                                                              | 0.698 | 600          | 1.060 | 2,400        | 1.690 | 8,500        | 2.570 | 40,000       | 4.310 |
| 180                                                              | 0.711 | 650          | 1.090 | 2,600        | 1.730 | 9,000        | 2.620 | 45,000       | 4.480 |
| 190                                                              | 0.724 | 700          | 1.120 | 2,800        | 1.780 | 9,500        | 2.670 | 50,000       | 4.640 |
| 200                                                              | 0.737 | 750          | 1.140 | 3,000        | 1.820 | 10,000       | 2.710 | 55,000       | 4.790 |
| 220                                                              | 0.761 | 800          | 1.170 | 3,200        | 1.860 | 11,000       | 2.800 | 60,000       | 4.930 |
| 240                                                              | 0.783 | 850          | 1.190 | 3,400        | 1.890 | 12,000       | 2.880 | 65,000       | 5.070 |
| 260                                                              | 0.804 | 900          | 1.220 | 3,600        | 1.930 | 13,000       | 2.960 | 70,000       | 5.190 |
| 280                                                              | 0.824 | 950          | 1.240 | 3,800        | 1.970 | 14,000       | 3.040 | 75,000       | 5.310 |
| 300                                                              | 0.843 | 1,000        | 1.260 | 4,000        | 2.000 | 15,000       | 3.110 | 80,000       | 5.430 |
| 320                                                              | 0.862 | 1,100        | 1.300 | 4,200        | 2.030 | 16,000       | 3.170 | 85,000       | 5.540 |
| 340                                                              | 0.879 | 1,200        | 1.340 | 4,400        | 2.060 | 17,000       | 3.240 | 90,000       | 5.650 |
| 360                                                              | 0.896 | 1,300        | 1.380 | 4,600        | 2.100 | 18,000       | 3.300 | 95,000       | 5.750 |
| 380                                                              | 0.913 | 1,400        | 1.410 | 4,800        | 2.130 | 19,000       | 3.360 | 100,000      | 5.850 |

# Speed factors ( $f_n$ ) for ball bearings

| $f_n$ values for ball bearings $f_n = \sqrt[3]{\frac{33\frac{1}{2}}{n}}$ |       |                           |       |                           |       |                           |       |                           |        |
|--------------------------------------------------------------------------|-------|---------------------------|-------|---------------------------|-------|---------------------------|-------|---------------------------|--------|
| n<br>(min <sup>-1</sup> )                                                | $f_n$ | n<br>(min <sup>-1</sup> ) | $f_n$ | n<br>(min <sup>-1</sup> ) | $f_n$ | n<br>(min <sup>-1</sup> ) | $f_n$ | n<br>(min <sup>-1</sup> ) | $f_n$  |
| 10                                                                       | 1.490 | 50                        | 0.874 | 300                       | 0.481 | 1,500                     | 0.281 | 7,500                     | 0.1640 |
| 11                                                                       | 1.450 | 55                        | 0.846 | 320                       | 0.471 | 1,600                     | 0.275 | 8,000                     | 0.1610 |
| 12                                                                       | 1.410 | 60                        | 0.822 | 340                       | 0.461 | 1,700                     | 0.270 | 8,500                     | 0.1580 |
| 13                                                                       | 1.370 | 65                        | 0.800 | 360                       | 0.452 | 1,800                     | 0.265 | 9,000                     | 0.1550 |
| 14                                                                       | 1.340 | 70                        | 0.781 | 380                       | 0.444 | 1,900                     | 0.260 | 9,500                     | 0.1520 |
| 15                                                                       | 1.300 | 75                        | 0.763 | 400                       | 0.437 | 2,000                     | 0.255 | 10,000                    | 0.1490 |
| 16                                                                       | 1.280 | 80                        | 0.747 | 420                       | 0.430 | 2,200                     | 0.247 | 11,000                    | 0.1450 |
| 17                                                                       | 1.250 | 85                        | 0.732 | 440                       | 0.423 | 2,400                     | 0.240 | 12,000                    | 0.1410 |
| 18                                                                       | 1.230 | 90                        | 0.718 | 460                       | 0.417 | 2,600                     | 0.234 | 13,000                    | 0.1370 |
| 19                                                                       | 1.210 | 95                        | 0.705 | 480                       | 0.411 | 2,800                     | 0.228 | 14,000                    | 0.1340 |
| 20                                                                       | 1.190 | 100                       | 0.693 | 500                       | 0.405 | 3,000                     | 0.223 | 16,000                    | 0.1280 |
| 22                                                                       | 1.150 | 110                       | 0.672 | 550                       | 0.393 | 3,200                     | 0.218 | 18,000                    | 0.1230 |
| 24                                                                       | 1.120 | 120                       | 0.652 | 600                       | 0.382 | 3,400                     | 0.214 | 20,000                    | 0.1190 |
| 26                                                                       | 1.090 | 130                       | 0.635 | 650                       | 0.372 | 3,600                     | 0.210 | 22,000                    | 0.1150 |
| 28                                                                       | 1.060 | 140                       | 0.620 | 700                       | 0.362 | 3,800                     | 0.206 | 24,000                    | 0.1120 |
| 30                                                                       | 1.040 | 150                       | 0.606 | 750                       | 0.354 | 4,000                     | 0.203 | 26,000                    | 0.1090 |
| 32                                                                       | 1.010 | 160                       | 0.593 | 800                       | 0.347 | 4,200                     | 0.199 | 28,000                    | 0.1060 |
| 34                                                                       | 0.993 | 170                       | 0.581 | 850                       | 0.340 | 4,400                     | 0.196 | 30,000                    | 0.1040 |
| 36                                                                       | 0.975 | 180                       | 0.570 | 900                       | 0.333 | 4,600                     | 0.194 | 32,000                    | 0.1010 |
| 38                                                                       | 0.957 | 190                       | 0.560 | 950                       | 0.327 | 4,800                     | 0.191 | 34,000                    | 0.0993 |
| 40                                                                       | 0.941 | 200                       | 0.550 | 1,000                     | 0.322 | 5,000                     | 0.188 | 36,000                    | 0.0975 |
| 42                                                                       | 0.926 | 220                       | 0.533 | 1,100                     | 0.312 | 5,500                     | 0.182 | 38,000                    | 0.0957 |
| 44                                                                       | 0.912 | 240                       | 0.518 | 1,200                     | 0.303 | 6,000                     | 0.177 | 40,000                    | 0.0941 |
| 46                                                                       | 0.898 | 260                       | 0.504 | 1,300                     | 0.295 | 6,500                     | 0.172 | 45,000                    | 0.0905 |
| 48                                                                       | 0.886 | 280                       | 0.492 | 1,400                     | 0.288 | 7,000                     | 0.168 | 50,000                    | 0.0875 |



## **NSK AMERICAS**

### **Argentina**

NSK Argentina SRL  
Buenos Aires  
54.11.4762.6556

### **Brazil**

NSK Brasil Ltda.  
Sao Paulo SP  
55.11.3269.4700

### **Canada**

NSK Canada Inc.  
Mississauga ON  
1.877.994.6675

### **Latin America**

NSK Latin America Inc.  
Miami FL  
1.305.477.0605

### **Mexico**

NSK Rodamientos Mexicana, S.A. de C.V.  
Tlaineapantla de Baz MX  
52.55.3682.2900

### **United States**

NSK Corporation  
Ann Arbor MI  
1.888.446.5675

**Website:** [www.nskamericas.com](http://www.nskamericas.com)

**NSK Global:** [www.nsk.com](http://www.nsk.com)

Every care has been taken to ensure the accuracy of the data contained in this brochure, but no liability can be accepted for any loss or damage suffered through errors or omissions.

Printed in Germany ©NSK 2014. The contents of this publication are the copyright of the publishers.